



FIRE PROTECTION AND LIFE SAFETY



Division 10 44 00
Fire Protection Cabinets
Fire Extinguishers
Fire Blankets



Division 10 43 00
Defibrillators and Cabinets
Emergency Oxygen Cabinets

Division 21 12 00
Fire Suppression Hoses
Hose Racks Valves and Nozzles



ACTIVAR INC.

CONSTRUCTION PRODUCTS GROUP



JL INDUSTRIES



AIR LOUVERS



HIAWATHA



SAMSON



THOMAS



ACCESSORIES
RIA
ROOFTOP



INTRODUCTION

ABOUT JL INDUSTRIES

Choices and Quality: We offer you the convenience of the full range of products from JL Industries, Samson Products and Thomas Enterprises complete in one catalog.

Here you can find the largest selection of fire extinguisher cabinets in the industry, including steel, stainless steel, aluminum, brass and bronze with a host of optional features. JL's reputation for quality products has made us an industry standard for over 70 years.

More Warehouse Locations: 1-3 day shipping on hundreds of our most popular products from our centrally-located warehouses in the US with our Quick Ship Program. See a list of locations on page 24, or check the latest stock list on our website.

Environmental: Contact us for the documentation you need.

Versatile Manufacturing Capabilities: With the combined resources of our two manufacturing facilities, you can create your own distinctive cabinet with the size and features you need, for the look you want. Just Ask Us!

Our involvement with organizations such as the National Fire Prevention Association (NFPA), the Door and Hardware Institute (DHI), the Construction Specifiers Institute (CSI) and the National Association of Fire Equipment Distributors (NAFED) enables us to remain at the forefront of industry requirements with products to keep you in compliance with current building codes.

Website Resources: Find all of the documentation you need and the most current product information on our website at WWW.ACTIVARCPG.COM

WARRANTY

All fire protection products carry a one-year warranty after date of shipment against defects in materials and workmanship. We will replace or repair any product found defective within this period at our discretion. No other warranty express or implied is valid. Fire extinguishers may carry a longer warranty.

AMERICANS WITH DISABILITIES ACT (ADA) GUIDELINES

Look for Model Numbers in Blue to find cabinets that meet the ADA 4" Projection Requirement.

- Cabinets with the number "2" as the fourth character of the model number. These models project only 4" from the wall and include a flush pull.
- All trimless and flat trim models with standard pull.
- All 1 1/4", 1 1/2", 2 1/2" or 3" trim models with standard pull—excluding bubble cabinets.



Projection Requirements

The federal regulations for ADA Standards for Accessible Design Section: Protruding Objects Section (28 CFR 36, 4.4.1) specify that "objects projecting from walls with their leading edges between 27" and 80" (685 mm and 2030 mm) above the finished floor (AFF) shall protrude no more than 4" (100mm) into walks, halls, corridors, passageways, or aisles. Please note that a surface-mounted cabinet installed in such a way that any part of it falls between 27" and 80" AAF would not meet ADA requirements.


These are national standards which are subject to change by local authorities having jurisdiction. ADA requirements, in particular, are constantly evolving through ongoing legislative and judicial actions. For more information: <http://www.ada.gov>

Mounting Heights


The NFPA and ADA have created guidelines for the mounting of cabinets and extinguishers to provide safety and/or easy access to the equipment. ADA guidelines specify reach ranges for building occupants who require access to equipment such as fire extinguishers and other fire safety devices. According to the ADA Standards (28 CFR 36, 4.2.5 and 4.2.6 the cabinet handle be mounted higher than 48" AFF for applications which allow for only a forward approach in a wheelchair to the object. It should be noted that these restrictions also fall within the current National Fire Protection Association (NFPA) guidelines, which call for a maximum mounting height of 60" AFF to the top of the extinguisher.

See our website for more information on mounting heights.

ADA COMPLIANT CABINET STYLES - TOP VIEW

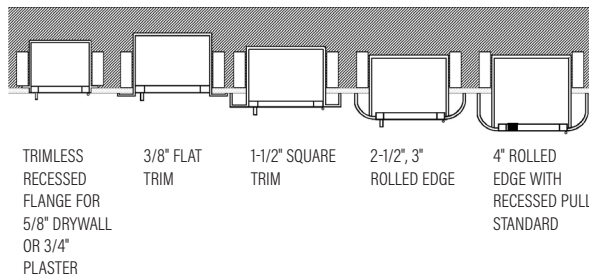

ADA MOUNTING HEIGHTS

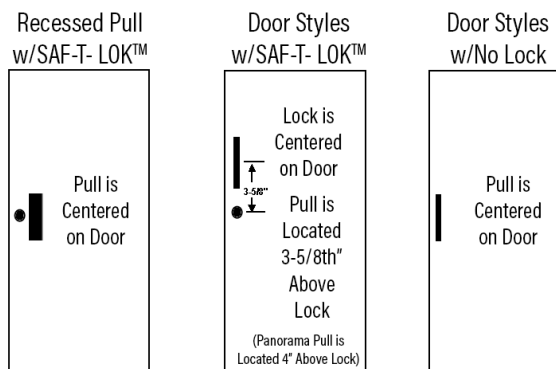



JL INDUSTRIES FIRE-FX2™ FIRE-RATED CABINETS

- ▶ UL-Listed
- ▶ Lightweight Insulation
- ▶ Lower Shipping Costs
- ▶ Easier to Install
- ▶ Patent-Pending



1037V10FX2

JL Industries led the industry by introducing the first pre-lined Fire-Rated Cabinets in 1991. Those cabinets have changed and simplified the installation process forever.

Now, JL has taken the next step and eliminated the heavy gypsum wallboard to line cabinets, by replacing it with lightweight, mineral wool insulation. The second steel tub is not needed with the new design, reducing the weight even further.

FIRE-FX2™ cabinets are insulated with Firespan™ 90 by Thermafiber®, a UL-Listed, inorganic, mineral wool fiber insulation with a high recycled content.

1000, 1800, 1500 Series Cabinets Weigh an average of 14.75 lbs less!

UL LISTED

Tested to maintain one and two-hour fire rated wall barriers, in accordance with ANSI/UL-1479 (ASTM E814 and ULC.CAN S115) for membrane penetration firestops.

TO ORDER OR SPECIFY

Just add **FIRE-FX2™** option to the end of the seven-digit JL model number. For example, if you want an Ambassador 1017F10 with the fire rated option, ask for the **1017F10FX2**.

FX2 WALL OPENINGS

Are slightly larger than the previous FX wall openings to accommodate FIRE-FX2™. See website for up to date catalogs and submittals.

Look for the Red FX2 Symbol!

Fire-Span™ Insulation

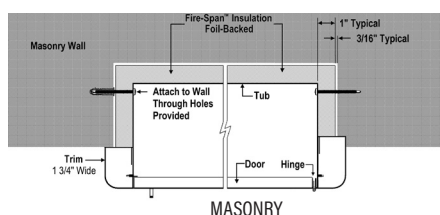
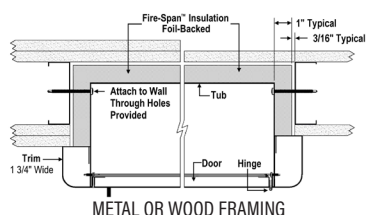


TABLE OF CONTENTS

STEEL

| | |
|--|-------|
| AMBASSADOR | 6-7 |
| CLASSIC | 12 |
| CLEAR VU | 9 |
| CROWNLIN VALVE/HOSE | 18-19 |
| DECORLINE | 13 |
| DEFIBRILLATOR | 16 |
| ECONOMYLINE | 12 |
| EMBASSY | 10 |
| ORBIT CABINET | 14 |
| PANORAMA | 8 |
| ROYAL BLANKET & EXTINGUISHER 3600 SERIES | 20 |
| SCHOOL | 16 |
| SECURITY | 16 |
| SMB | 9 |

STAINLESS STEEL

| | |
|--|-------|
| CLEAR VU | 9 |
| COSMOPOLITAN | 6-7 |
| CROWNLIN VALVE/HOSE | 18-19 |
| DEFIBRILLATOR | 16 |
| EMBASSY | 10 |
| ORBIT CABINET | 14 |
| PANORAMA | 8 |
| ROYAL BLANKET & EXTINGUISHER 3600 SERIES | 20 |
| SCHOOL | 16 |
| SECURITY | 16 |

ALUMINUM

| | |
|--|-------|
| ACADEMY | 6-7 |
| CLASSIC | 12 |
| CLEAR VU | 9 |
| CROWNLIN VALVE/HOSE | 18-19 |
| DECORLINE | 13 |
| DEFIBRILLATOR | 16 |
| ECONOMYLINE | 12 |
| EMBASSY | 10 |
| PANORAMA | 8 |
| ROYAL BLANKET & EXTINGUISHER 3600 SERIES | 20 |
| SM | 14 |

ABS PLASTIC & FIBERGLASS

| | |
|-----------|----|
| ABS | 12 |
| FB | 14 |

BRONZE & BRASS

| | |
|---------------------|----|
| CAVALIER | 11 |
| CLEAR VU | 9 |
| EMBASSY | 10 |
| ORBIT CABINET | 14 |

| | |
|-------------------------------|--------|
| EXTINGUISHERS | 11 |
| AED CABINETS | 16 |
| FIRE HOSE EQUIPMENT | 17 |
| ACCESSORIES | 20, 21 |
| PROJECT GALLERY | 22 |
| KEY TO CABINET NUMBERS | 23 |
| OPTIONAL METAL FINISHES | 24 |



FIRE EXTINGUISHERS

COSMIC EXTINGUISHERS: MULTI-PURPOSE CHEMICAL

General Data: These units contain specially fluidized and siliconized mono ammonium phosphate powder, which smothers and breaks the chain reaction on Class B fires, fuses and insulates Class A fires and is a non-conductor of electricity. Non-toxic.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation approved to -65°F (-52°C).

Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube, replaceable molded valve stem seal, visual pressure gauge, pull pin and upright squeeze grip. Corrosion and impact-resistant powder coat finish.

CLASS A,B,C Fires



GALAXY EXTINGUISHERS: REGULAR DRY CHEMICAL

General Data: These models contain a siliconized sodium bicarbonate base, the traditional dry chemical. Cleanup after use is generally easy, because the chemical does not normally bake to a hot metal surface. Non-toxic.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Upright squeeze grip operation approved to -65°F (-52°C).

Construction: Heavy-duty steel cylinder with rugged metal valve and siphon tube with replaceable valve stem seal, visual pressure gauge pull pin and upright squeeze grip.

CLASS B,C Fires



SATURN EXTINGUISHERS: CLASS A:K WET CHEMICAL

General Data: These units are ideal for commercial restaurant applications as a portable supplement to pre-engineered suppression systems. A low "pH" potassium acetate solution is discharged in a fine mist that provides excellent range while preventing splashing and creating an effective saponification foam-type blanket necessary for suppressing liquid cooking media fires.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out.

Construction: Stainless steel cylinder with protective nozzle tip orifice seal and non-metallic nozzle tip finger guard. Industry standard horn and nozzle design. Name plate shows only the class "K" symbol.

CLASS A: K Fires.



All units meet the current requirements established by the National Fire Protection Association (NFPA) for NFPA10 (2013 version) "Standard for Portable Fire Extinguishers", and any other applicable NFPA standards. All units UL listed for US and Canada and meet local and national OSHA requirements for fire extinguishers.



CLASS A FIRES - PAPER, WOOD, CLOTH, ETC., WHERE QUENCHING BY WATER OR INSULATING BY DRY CHEMICAL IS EFFECTIVE.



CLASS B FIRES - FLAMMABLE LIQUIDS WHERE SMOTHERING ACTION IS REQUIRED.



CLASS C FIRES - LIVE ELECTRICAL EQUIPMENT WHERE THE NON-CONDUCTIVITY OF EXTINGUISHANT IS VITAL.



CLASS K FIRES

MERCURY EXTINGUISHERS: HALOTRON®

General Data: This model contains the clean extinguishing agent Halotron® 1, which is EPA-approved, government-accepted and specified. This agent discharges as a liquid, then quickly evaporates, leaving no residue to clean up afterwards. U.S. FAA-approved for use in airports. Electrically non-conductive.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out.

Temperature range from -40°F to +120°F.

Construction: Drawn steel cylinder with steel siphon tubes, power cone discharge stream, upright squeeze grip visual pressure gauge and corrosion-resistant paint finish.

CLASS A,B,C Fires



SENTINEL EXTINGUISHERS: CARBON DIOXIDE

General Data: This extinguisher contains liquid carbon dioxide under pressure.

Operation: Squeeze the lever, which opens the valve, allowing the carbon dioxide to be forced out. The discharge, which changes into a gas and appears as a smothering cloud of white snow, is then directed to the fire through a funnel-shaped horn. Electrically non-conductive.

Construction: Lightweight, high-pressure, aluminum cylinder with O-ring seal and straight thread all-metal valve fits all sizes. The Sentinel is absolutely rust-free and up to 30% lighter than CO2 units with steel cylinders.

CLASS B,C Fires



NEBULA EXTINGUISHERS: WATER MIST FOR ELECTRICAL

General Data: This non-toxic water mist extinguisher is ideal for Class A fires and where a potential Class C (electrical) hazard exists. Units shipped empty.

Operation: The unique misting nozzle provides safety from electrical shock, making this extinguisher ideal for use in telecommunications and cleanroom environments.

Construction: Non-magnetic cylinder and misting nozzle. For use in medical facilities.

Class A,C Fires



GRENADIER EXTINGUISHERS: PRESSURIZED WATER

General Data: The "water press" extinguisher contains water and compressed air. Units shipped empty.

Operation: Squeeze the lever, which opens the valve, allowing the water to be forced out. Upright squeeze grip operation.

Construction: Butt-welded 304-L stainless steel cylinder (eliminates all internal and external crevices). Rugged stainless steel discharge lever and fixed carry handle with visual pressure gauge, pull pin. Heavy-duty, brass, chrome-plated valve body with replaceable molded valve stem seal. UL labeled chemical engine hose.

CLASS A Fires





WHEELED EXTINGUISHERS: MULTI-PURPOSE AND REGULAR DRY CHEMICAL

General Data: Available in three size capacities with two choices of extinguishing agent and three different operational design configurations, the best match for your hazard protection needs can be accurately selected, maximizing the fire safety of your operation. Easily transportable through doorways and over rough terrain. See submittals for complete information.

Typical Uses: Offshore rigs, ship docks, refineries, chemical plants, aircraft ramps, processing plants, storage and loading areas.

Construction: DOT approved cylinders with chrome plated brass valve assemblies. Cylinders are manufactured to DOT specification 4BW240. Highly visible pressure-indicating gauge. Cylinders and carriages are shot blasted, primed and coated with powder paint finish that exceeds Underwriter's Laboratories 240 hour salt spray requirements. Hoses are included see submittal for sizes. All units are equipped with all weather semi-pneumatic 12.3 inch diameter, 3.5 inch wide tires that allows for easy movability through narrow doors and walkways by a single operator. Built to ANSI/UL 299 and 711 standards.

Other Extinguishant Types: Carbon Dioxide and Halotron™ wheeled units also available. See website for more information.



LOW PROFILE ORBIT EXTINGUISHERS: MULTI-PURPOSE ABC OR PURPLE K

General Data: Available for wall in both Multi-Purpose ABC or Purple K (FE10VB & FPK10VB) or available in cabinet mount version with Multi-Purpose ABC (FE10V). See JL's low profile 2100 series cabinet on pg. 14.

Operation: Squeeze the lever, which opens the valve, allowing the chemical to be forced out. Temperature range from -40°F to +120°F.

Construction: Corrosion-resistant, powder coated, tempered aluminum vessel with aluminum valve and siphon tube. Visual pressure gauge, stainless steel pull pin, handles, bracket and button hook.



| Model | Nominal Capacity | Shipping Weight | Cylinder Diameter | Overall Height | Overall Width | Shipping Volume | U/L Rating | Optional Mounting Bracket | US Coast Guard Approved |
|-----------------------------|------------------|-----------------|-------------------|----------------|---------------|-----------------|----------------|---|-------------------------|
| Grenadier-P | 2-1/2 gal. | 7.75 lbs. | 7 | 24-1/2 | 9 | 1.1 cu.ft. | 2A | MB810 | YES |
| Cosmic 2-1/2E* | 2-1/2 lbs. | 5.5 lbs. | 3-3/8 | 15-1/2 | 5-3/4 | .2 cu.ft. | 1A-10B:C | MB817C or MB817A* | YES |
| Cosmic 5E | 5 lbs. | 10 lbs. | 4-1/4 | 16-3/8 | 7-1/4 | .35 cu.ft. | 3A-40B:C | MB818C or MB 818A | YES |
| Cosmic 6E | 6 lbs. | 12.75 lbs. | 5 | 16 | 7-3/4 | .5 cu.ft. | 3A-40B:C | MB808A | YES |
| Cosmic 10E | 10 lbs. | 18.25 lbs. | 5-1/8 | 21 | 7-3/4 | .65 cu.ft. | 4A-80B:C | MB846C or MB846A | YES |
| Cosmic 20E (FE20C) | 20 lbs. | 33.5 lbs. | 7-1/2 | 21-1/4 | 8-3/4 | 1.0 cu.ft. | 10A-120B:C | MB811C | YES |
| Cosmic 20E (FE20A) | 20 lbs. | 38 lbs. | 7 | 24 | 10-1/4 | 1.0 cu.ft. | 10A-120B:C | MB810A | YES |
| Sentinel 5 | 5 lbs. | 14 lbs. | 5-1/4 | 17-3/4 | 8-1/4 | .65 cu.ft. | 5B:C | MB809C or MB809A | YES |
| Sentinel 10 | 10 lbs. | 28.25 lbs. | 7 | 24 | 12 | 1.3 cu.ft. | 10B:C | MB810C or MB810A | YES |
| Sentinel 15 | 15 lbs. | 37.75 lbs. | 7 | 30 | 12 | 1.0 cu.ft. | 10B:C | MB810C or MB864A | YES |
| Sentinel 20 | 20 lbs. | 50.75 lbs. | 8 | 30 | 13 | 2.1 cu.ft. | 10B:C | MB811C or MB811A | YES |
| Galaxy 2-1/2* | 2-1/2 lbs. | 5.5 lbs. | 3-3/8 | 15-1/2 | 5-3/4 | .2 cu.ft. | 10B:C | MB817C or MB817A* | YES |
| Galaxy 5 | 5 lbs. | 9.25 lbs. | 4-1/4 | 15-1/4 | 5-1/2 | .35 cu.ft. | 10B:C | MB818A | YES |
| Galaxy 5-1/2 | 5-1/2 lbs. | 10.5 lbs. | 4-1/4 | 16-3/8 | 7-1/4 | .4 cu.ft. | 40B:C | MB818C or MB818A | YES |
| Galaxy 6 | 6 lbs. | 13.75 lbs. | 5 | 16-1/4 | 8-1/2 | .5 cu.ft. | 40B:C | MB808A | YES |
| Galaxy 10 | 10 lbs. | 18.25 lbs. | 5-1/8 | 21 | 7-3/4 | .65 cu.ft. | 40B:C or 60B:C | MB846C or MB846A | YES |
| Galaxy 20 | 20 lbs. | 38 lbs. | 7-1/2 | 23-1/4 | 10-1/4 | 1.0 cu.ft. | 120B:C | MB810C or MB810A | YES |
| Mercury 2-1/2* | 2-1/2 lbs | 5.25 lbs | 3-3/8 | 15-1/2 | 6-3/8 | .25 cu.ft. | 2B:C | MB817C or MB817A* | N/A |
| Mercury 5 | 5 lbs | 9.5 lbs | 4-1/4 | 16-3/8 | 7-1/4 | .3 cu.ft. | 5B:C | MB818C or MB818A | YES |
| Mercury 11 (FM11C) | 11 lbs | 21.25 lbs | 7 | 17-1/2 | 8-5/8 | 1.0 cu.ft. | 1A-10B:C | MB810C | YES |
| Mercury 11 (FM11A) | 11 lbs | 22.5 lbs | 6 | 21-7/8 | 9-1/4 | 1.0 cu.ft. | 1A-10B:C | MB812A | YES |
| Mercury 15-1/2 (FM15C) | 15-1/2 lbs | 25.75 lbs | 7 | 17-1/2 | 8-5/8 | 1.0 cu.ft. | 2A-10B:C | MB810C | YES |
| Mercury 15-1/2 (FM15A) | 15-1/2 lbs | 27.5 lbs | 6 | 21-7/8 | 9-1/4 | 1.0 cu.ft. | 2A-10B:C | MB812A | YES |
| Saturn 15 | 1.8 gal | 22.5 lbs | 7 | 19-1/4 | 9 | .9 cu.ft. | 1-A:K or 2-A:K | MB810C or MB810A | -- |
| Saturn 25 | 2.5 gal | 33.5 lbs. | 7 | 24-1/2 | 9 | 1.1 cu.ft. | 1-A:K or 2-A:K | MB810C or MB810A | -- |
| Nebula 270 | 1.75 gal | 7 lbs. « | 7 | 24-1/2 | 11 | 1.1 cu. ft. | 2A:C | MB810NM | -- |
| Nebula 272 | 2.5 gal | 8 lbs. « | 7 | 27-1/2 | 11 | 1.3 cu ft. | 2A:C | MB810NM | -- |
| Nebula 250 | 2.5 gal | 8.3 lbs.« | 7 | 28 | 14 | 1.3 cu ft. | 2A:C | -- | -- |
| Orbit ABC 10 (FE10V) | 10 lbs. | 28.5 lbs. | 3 x 10 | 22 | 11 | | 4A:80B:C | Button Hook Incl. for Wall or Cabinet Mount | -- |
| Orbit ABC 10 (FE10VB) | 10 lbs. | 26.5 lbs. | 3 -1/2 x 8 | 23 | 9 | | 4A:80B:C | Wall Mount Button Hook Incl. | -- |
| Orbit Purple K 10 (FPK10VB) | 10 lbs. | 26.6 lbs. | 3.5 x 8 | 23 | 9 | | 80-B:C | Wall Mount Button Hook Incl. | -- |

Dimensions in Inches

*INDICATES MOUNTING BRACKET STANDARD. J HOOK WALL BRACKET STANDARD WITH ALL OTHER EXTINGUISHERS.

NOTE: JL EXTINGUISHERS ARE SHIPPED FULLY CHARGED WITH THE EXCEPTION OF THE GRENADE AND NEBULA. NFPA REGULATIONS ALSO REQUIRE EXTINGUISHERS TO BE INSPECTED WHEN INITIALLY PLACED IN SERVICE AND ALL LOCAL FIRE CODE AND ALL LOCAL FIRE CODE AND TAGGING REQUIREMENTS MUST BE ADHERED TO. ALL FIRE EXTINGUISHER SIZES ARE NOMINAL. CONTACT CUSTOMER SERVICE FOR MORE INFORMATION ABOUT ORDERING TAGGED EXTINGUISHERS IN YOUR AREA.



FIRE EXTINGUISHER CABINETS

AMBASSADOR SERIES: STEEL TRIM AND DOOR

Door and Trim Construction: Cold rolled steel with white powder-coat finish standard. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge or optional rolled edge upon request. 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing.

Tub: Constructed of cold rolled steel with white powder-coat finish standard.

Options at Additional Cost: Color door and trim or tub. Rolled Edge Surface Mount Cabinet. Custom colors. See page 24.

Fire-Rated Option Available: Yes



AMBASSADOR 1017F10
WITH OPTIONAL LETTERING
(BLK OPTION)



AMBASSADOR
1013F10

ACADEMY SERIES: ALUMINUM TRIM AND DOOR

Door and Trim Construction: Clear anodized aluminum. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge. 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing. Rolled edge models are constructed of mechanically-joined extrusions, except for models 1827 and 1027 which are die formed. Die formed corners provide an attractive, rounded edge - unique to the JL line of cabinets!

Tub: Constructed of cold rolled steel with white powder-coat finish standard. Surface-mounted models have clear anodized aluminum tubs.

Options at Additional Cost: Dark bronze anodized finish. See page 24. Aluminum tub for non-rated use (#180 clear anodized).

Fire-Rated Option Available: Yes



ACADEMY 1027V10 (DK
BRONZE OPTION)



ACADEMY C1027V10

COSMOPOLITAN SERIES: STAINLESS STEEL TRIM AND DOOR

Door and Trim Construction: No. 4 Stainless Steel Trim and Door. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge or optional rolled edge upon request. 1 3/4" face trim on frame and 1 1/4" trim on doors with glazing.

Tub: Constructed of cold rolled steel with white powder-coat finish standard. Surface-mounted models have No 4 stainless tubs.

Options at Additional Cost: Custom stainless finishes - #6 satin, #7 polished, #8 mirror. Stainless tub with #4 finish. Rolled Edge Surface Mount Cabinet.

Fire-Rated Option Available: Yes



COSMOPOLITAN 1036F16
(POLISHED #7)



COSMOPOLITAN
1035S21

CABINET OPTIONS FOR ALL MODELS: AMBASSADOR, ACADEMY & COSMOPOLITAN

Door Styles w/Pull

- F** Full Glazing
- G** Full Glazing & SAF-T-LOK™
- D** Horizontal Duo Panel
- E** Horizontal Duo Panel & SAF-T-LOK™
- S21** Solid
- L22** Solid & SAF-T-LOK™
- L24** Solid with Cylinder Lock & No Handle
- B10** Solid with 2" x 4" Acrylic Insert & SAF-T-LOK
- V** Vertical Duo
- W** Vertical Duo & SAF-T-LOK™


Door Glazing

- 10** Clear Acrylic
- 13** Clear Wire Glass w/ Safety Film
- 15** Bronze Acrylic
- 16** Gray Acrylic
- 17** Clear Tempered Glass
- 18** Laminated Safety Glass

Options at Additional Cost

- Vertical or Horizontal Lettering - See Page 21
- Futura Embossed "Fire" Handle in Mill, White or Red
- Flush Pull or Chrome Pull
- Wall Signs & Alarms - See Page 20
- Red or Black Painted Steel Tub
- Engraved Metal Door or Etched Glass

TOP VIEW

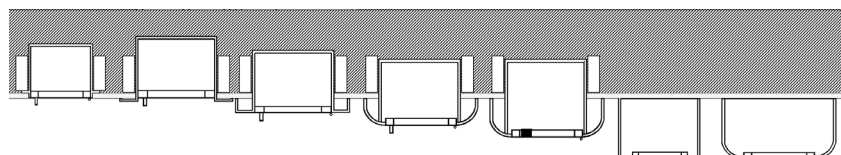

TRIMLESS
RECESSED
FLANGE FOR 5/8"
DRYWALL OR
3/4" PLASTER

3/8" FLAT
TRIM

1-1/2" SQUARE
TRIM


2-1/2", 3"
ROLLED EDGE

4" ROLLED
EDGE WITH
RECESSED PULL
STANDARD

SURFACE
MOUNT
SQUARE
TRIM

SURFACE MOUNT
OPTIONAL
ROLLED EDGE

AMBASSADOR, ACADEMY, COSMOPOLITAN: DOOR STYLES

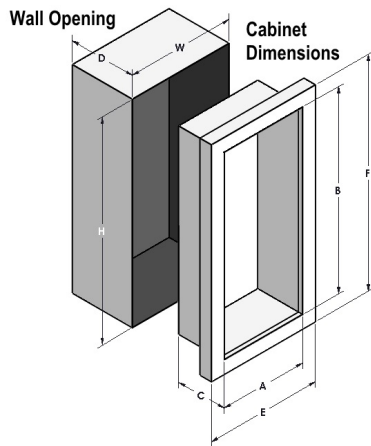

SELECTION CHART FOR AMBASSADOR, ACADEMY, COSMOPOLITAN SERIES

| Trim and Door Material and Series # | | | | Tub I.D. | | | Frame O.D. | | Wall Opening: Non-rated | | | Wall Opening: FX2 Option | | | Accommodates Following Extinguishers |
|-------------------------------------|----------|-----------------|-------------------------|----------|---------|-------|------------|--------|----------------------------|----|--------|-----------------------------|---------|----------|---|
| Steel | Aluminum | Stainless Steel | Trim Style | A | B | C | E | F | W | H | D | W | H | D | |
| AMBASSADOR | ACADEMY | COSMOPOLITAN | | Width | Height | Depth | | | | | | | | | |
| 8114 | 8124 | 8134 | Trimless 5/8" Drywall ‡ | 9 | 18 | 5 1/2 | 12 1/8 | 21 1/8 | 10 | 19 | 5 5/8 | 11 5/16 | 20 5/16 | 6 3/16 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 (Mount 6lb to tub) |
| 8115 | 8125 | 8135 | Flat Trim | 9 | 18 | 5 1/2 | 12 3/8 | 21 3/8 | 10 | 19 | 5 3/8 | 11 5/16 | 20 5/16 | 6 7/16 | |
| 8116 | 8126 | 8136 | 1 1/2" Square | 9 | 18 | 5 1/2 | 12 3/8 | 21 3/8 | 10 | 19 | 4 1/8 | 11 5/16 | 20 5/16 | 5 3/16 | |
| 8117 | 8127 | 8137 | 2 1/2" Rolled | 9 | 18 | 5 1/2 | 12 3/8 | 21 3/8 | 10 | 19 | 3 1/8* | 11 5/16 | 20 5/16 | 4* | |
| 8113 | 8123 | 8133 | Surf. Mtd. | 12 3/16 | 21 3/16 | 6 | 12 3/8 | 21 3/8 | -- | -- | -- | -- | -- | -- | |
| 1710 | 1720 | 1730 | 2 1/4" Square | 10 1/2 | 24 | 5 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 3 | 12 13/16 | 26 5/16 | 4 | Cosmic & Galaxy 2.5-6, Mercury 2.5 & 5 (Mount 6lb to tub) |
| 1815 | 1825 | 1835 | Flat Trim | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 5 3/8 | 12 13/16 | 26 5/16 | 6 7/16 | |
| 1816 | 1826 | 1836 | 1 1/2" Square | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 4 1/8 | 12 13/16 | 26 5/16 | 5 3/16 | |
| 1817 | 1827 | 1837 | 3" Rolled | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 2 5/8 | 12 13/16 | 26 5/16 | 3 5/8 | |
| 1812 | 1822 | 1832 | 4" Rolled, Flush Pull | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 7/8* | 12 13/16 | 26 5/16 | 2 7/8* | |
| 1818 | 1828 | 1838 | 4 1/2" Rolled | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 1/8* | 12 13/16 | 26 5/16 | 2 3/16* | Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5, Sentinel 5 |
| 1014 | 1024 | 1034 | Trimless 5/8" Drywall ‡ | 10 1/2 | 24 | 6 | 13 5/8 | 27 1/8 | 11 1/2 | 25 | 6 1/8 | 12 13/16 | 26 5/16 | 6 11/16 | |
| 1015 | 1025 | 1035 | Flat Trim | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 5 7/8 | 12 13/16 | 26 5/16 | 6 15/16 | |
| 1016 | 1026 | 1036 | 1 1/2" Square | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 4 5/8 | 12 13/16 | 26 5/16 | 5 11/16 | |
| 1017 | 1027 | 1037 | 3" Rolled | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 3 1/8 | 12 13/16 | 26 5/16 | 4 | |
| 1012 | 1022 | 1032 | 4" Rolled, Flush Pull | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 2 3/8* | 12 13/16 | 26 5/16 | 3 3/8* | Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 |
| 1018 | 1028 | 1038 | 4 1/2" Rolled | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 5/8* | 12 13/16 | 26 5/16 | 2 11/16* | |
| 1013 | 1023 | 1033 | Surf. Mtd. | 13 11/16 | 27 3/16 | 6 1/2 | 13 7/8 | 27 3/8 | -- | -- | -- | -- | -- | -- | |
| 2014 | 2024 | 2034 | Trimless 5/8" Drywall ‡ | 12 | 27 | 7 3/4 | 15 1/8 | 30 1/8 | 13 | 28 | 7 7/8 | 14 5/16 | 29 5/16 | 8 7/16 | |
| 2015 | 2025 | 2035 | Flat Trim | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 7 5/8 | 14 5/16 | 29 5/16 | 8 11/16 | |
| 2016 | 2026 | 2036 | 1 1/4" Square | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 6 5/8 | 14 5/16 | 29 5/16 | 7 11/16 | Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 & 15, 272 |
| 2017 | 2027 | 2037 | 2 1/2" Rolled | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 5 3/8* | 14 5/16 | 29 5/16 | 6 7/16* | |
| 2012 | 2022 | 2032 | 4" Rolled, Flush Pull | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 4 1/8* | 14 5/16 | 29 5/16 | 5 1/8* | |
| 2018 | 2028 | 2038 | 4 1/2" Rolled | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 3 3/8* | 14 5/16 | 29 5/16 | 4 7/16* | |
| 2013 | 2023 | 2033 | Surf. Mtd. | 15 3/16 | 30 3/16 | 8 1/4 | 15 3/8 | 30 3/8 | -- | -- | -- | -- | -- | -- | |
| 3015 | 3025 | 3035 | Flat Trim | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 7 5/8 | 18 5/16 | 34 5/16 | 8 11/16 | Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 & 15, 272 |
| 3016 | 3026 | 3036 | 1 1/4" Square | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 6 5/8 | 18 5/16 | 34 5/16 | 7 11/16 | |
| 3017 | 3027 | 3037 | 2 1/2" Rolled | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 5 3/8* | 18 5/16 | 34 5/16 | 6 7/16* | |
| 3012 | 3022 | 3032 | 4" Rolled, Flush Pull | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 4 1/8* | 18 5/16 | 34 5/16 | 5 1/8* | |
| 3018 | 3028 | 3038 | 4 1/2" Rolled | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 3 3/8* | 18 5/16 | 34 5/16 | 4 7/16* | |
| 4015 | 4025 | 4035 | Flat Trim | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 7 5/8 | 22 5/16 | 29 5/16 | 8 11/16 | Two Each of Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 |
| 4016 | 4026 | 4036 | 1 1/4" Square | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 6 5/8 | 22 5/16 | 29 5/16 | 7 11/16 | |
| 4017 | 4027 | 4037 | 2 1/2" Rolled | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 5 3/8* | 22 5/16 | 29 5/16 | 6 7/16* | |
| 4012 | 4022 | 4032 | 4" Rolled, Flush Pull | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 4 1/8* | 22 5/16 | 29 5/16 | 5 1/8* | |
| 4018 | 4028 | 4038 | 4 1/2" Rolled | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 3 3/8* | 22 5/16 | 29 5/16 | 4 7/16* | |
| 4013 | 4023 | 4033 | Surf. Mtd. | 23 3/16 | 30 3/16 | 8 1/4 | 23 3/8 | 30 3/8 | -- | -- | -- | -- | -- | -- | |

Dimensions in Inches

‡ TRIMLESS MODELS FEATURE NEW DESIGN AND MAY BE INSTALLED BEFORE DRYWALL - SEE SUBMITTAL AND INSTALLATION INFORMATION

*ADD 5/8" WALL DEPTH FOR CABINETS WITH ALUMINUM FRAMES.

**COSMIC 20 & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.



FIRE EXTINGUISHER CABINETS

PANORAMA SERIES: FRAMELESS ACRYLIC DOOR

Door and Trim Construction: The Panorama features a frameless acrylic door of clear or opaque textured acrylic. The "stippled" texture of the opaque doors and exclusive aluminum backing protect the lettering, which is available in 3 colors and configurations. Clear doors also available. Flush cabinet doors are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. Trim is cold rolled steel with white powder-coat, clear anodized aluminum, or #4 stainless steel. 4" Rolled trim cabinets with P and Q style door have recessed pull to meet ADA projection standards.

Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 2 1/2", 3", 4" (recessed pull), 4 1/2" Rolled Edge. Surface-mount has a square edge or optional rolled edge for steel or stainless steel upon request. 1 3/4" face trim on frame. See page 6.

Tub: Constructed of cold rolled steel with white powder-coat finish standard.

Fire-Rated Option Available: Yes

Door Styles w/Pull

C70 Clear 3/16" Unlettered Smooth Acrylic

C71 Clear 3/16" Unlettered Smooth Acrylic with SAF-T-LOK™

P Identity: 3/16" Textured Obscure Acrylic with Lettering

Q Identity: 3/16" Textured Obscure Acrylic with Lettering & SAF-T-LOK™

Options at Additional Cost

Futura Pull,

Flush Pull for P and Q Style Doors

Other Color Tub

Wall Signs & Alarms - Page 21

Door Glazing

40 Vertical Black Bkgd, White Lettering

41 Vertical Red Bkgd, White Lettering

42 Vertical White Bkgd, Black Lettering

43 Vertical White Bkgd, Red Lettering

45 Horizontal Black Bkgd, White Lettering

46 Horizontal Red Bkgd, White Lettering

47 Horizontal White Bkgd, Black Lettering

48 Horizontal White Bkgd, Red Lettering

50 Ascending, Black Bkgd, White Lettering

51 Ascending, Red Bkgd, White Lettering

52 Ascending, White Bkgd, Black Lettering

53 Ascending, White Bkgd, Red Lettering




PANORAMA
1036C70 W/
COSMIC 10E



PANORAMA
1012P48 FLUSH
PULL STANDARD



SELECTION CHART FOR PANORAMA SERIES

| Trim and Door Material and Series # | | | | Tub I.D. | | | Frame O.D. | | Wall Opening: Non-rated | | | Wall Opening: FX2 Option | | |  | Accommodates Following Extinguishers |
|-------------------------------------|---------------|--------------------|-------------------------|----------|---------|-------|------------|--------|----------------------------|----|--------|-----------------------------|---------|----------|--|--|
| Steel | Alumi- num | Stainless Steel | Trim Style | A | B | C | E | F | W | H | D | W | H | D | | |
| 8114 | -- | -- | Trimless 5/8" Drywall ‡ | 9 | 18 | 5 1/2 | 12 1/8 | 21 1/8 | 10 | 19 | 5 5/8 | 11 5/16 | 20 5/16 | 6 3/16 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 (Mount 6lb to tub) | |
| 8115 | 8125 | 8135 | Flat Trim | 9 | 18 | 5 1/2 | 12 3/8 | 21 3/8 | 10 | 19 | 5 3/8 | 11 5/16 | 20 5/16 | 6 7/16 | | |
| 8116 | 8126 | 8136 | 1 1/2" Square | 9 | 18 | 5 1/2 | 12 3/8 | 21 3/8 | 10 | 19 | 4 1/8 | 11 5/16 | 20 5/16 | 5 3/16 | | |
| 8117 | 8127 | 8137 | 2 1/2" Rolled | 9 | 18 | 5 1/2 | 12 3/8 | 21 3/8 | 10 | 19 | 3 1/8* | 11 5/16 | 20 5/16 | 4* | | |
| 8113 | 8123 | 8133 | Surf. Mtd. | 12 3/16 | 21 3/16 | 6 | 12 3/8 | 21 3/8 | -- | -- | -- | -- | -- | -- | | |
| 1815 | 1825 | 1835 | Flat Trim | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 5 3/8 | 12 13/16 | 26 5/16 | 6 7/16 | Cosmic & Galaxy 2.5-6, Mercury 2.5 & 5 (Mount 6lb to tub) | |
| 1816 | 1826 | 1836 | 1 1/2" Square | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 4 1/8 | 12 13/16 | 26 5/16 | 5 3/16 | | |
| 1817 | 1827 | 1837 | 3" Rolled | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 2 5/8 | 12 13/16 | 26 5/16 | 3 5/8 | | |
| 1812 | 1822 | 1832 | 4" Rolled, Flush Pull | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 7/8* | 12 13/16 | 26 5/16 | 2 7/8* | | |
| 1818 | 1828 | 1838 | 4 1/2" Rolled | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 1/8* | 12 13/16 | 26 5/16 | 2 3/16* | | |
| 1014 | -- | -- | Trimless 5/8" Drywall ‡ | 10 1/2 | 24 | 6 | 13 5/8 | 27 1/8 | 11 1/2 | 25 | 6 1/8 | 12 13/16 | 26 5/16 | 6 11/16 | Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5, Sentinel 5 | |
| 1015 | 1025 | 1035 | Flat Trim | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 5 7/8 | 12 13/16 | 26 5/16 | 6 15/16 | | |
| 1016 | 1026 | 1036 | 1 1/2" Square | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 4 5/8 | 12 13/16 | 26 5/16 | 5 11/16 | | |
| 1017 | 1027 | 1037 | 3" Rolled | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 3 1/8 | 12 13/16 | 26 5/16 | 4 | | |
| 1012 | 1022 | 1032 | 4" Rolled, Flush Pull | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 2 3/8* | 12 13/16 | 26 5/16 | 3 3/8* | | |
| 1018 | 1028 | 1038 | 4 1/2" Rolled | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 5/8* | 12 13/16 | 26 5/16 | 2 11/16* | Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 | |
| 1013 | 1023 | 1033 | Surf. Mtd. | 13 11/16 | 27 3/16 | 6 1/2 | 13 7/8 | 27 3/8 | -- | -- | -- | -- | -- | -- | | |
| 2014 | -- | -- | Trimless 5/8" Drywall ‡ | 12 | 27 | 7 3/4 | 15 1/8 | 30 1/8 | 13 | 28 | 7 7/8 | 14 5/16 | 29 5/16 | 8 7/16 | | |
| 2015 | 2025 | 2035 | Flat Trim | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 7 5/8 | 14 5/16 | 29 5/16 | 8 11/16 | | |
| 2016 | 2026 | 2036 | 1 1/4" Square | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 6 5/8 | 14 5/16 | 29 5/16 | 7 11/16 | | |
| 2017 | 2027 | 2037 | 2 1/2" Rolled | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 5 3/8* | 14 5/16 | 29 5/16 | 6 7/16* | Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 & 15, 272 | |
| 2012 | 2022 | 2032 | 4" Rolled, Flush Pull | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 4 1/8* | 14 5/16 | 29 5/16 | 5 1/8* | | |
| 2018 | 2028 | 2038 | 4 1/2" Rolled | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 3 3/8* | 14 5/16 | 29 5/16 | 4 7/16* | | |
| 2013 | 2023 | 2033 | Surf. Mtd. | 15 3/16 | 30 3/16 | 8 1/4 | 15 3/8 | 30 3/8 | -- | -- | -- | -- | -- | -- | | |
| 3015 | 3025 | 3035 | Flat Trim | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 7 5/8 | 18 5/16 | 34 5/16 | 8 11/16 | | |
| 3016 | 3026 | 3036 | 1 1/4" Square | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 6 5/8 | 18 5/16 | 34 5/16 | 7 11/16 | Two Each of Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 | |
| 3017 | 3027 | 3037 | 2 1/2" Rolled | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 5 3/8* | 18 5/16 | 34 5/16 | 6 7/16* | | |
| 3012 | 3022 | 3032 | 4" Rolled, Flush Pull | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 4 1/8* | 18 5/16 | 34 5/16 | 5 1/8* | | |
| 3018 | 3028 | 3038 | 4 1/2" Rolled | 16 | 32 | 7 3/4 | 19 3/8 | 35 3/8 | 17 | 33 | 3 3/8* | 18 5/16 | 34 5/16 | 4 7/16* | | |
| 3013 | 3023 | 3033 | Surf. Mtd. | 19 3/16 | 35 3/16 | 8 1/4 | 19 3/8 | 35 3/8 | -- | -- | -- | -- | -- | -- | | |
| 4015 | 4025 | 4035 | Flat Trim | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 7 5/8 | 22 5/16 | 29 5/16 | 8 11/16 | Two Each of Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 | |
| 4016 | 4026 | 4036 | 1 1/4" Square | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 6 5/8 | 22 5/16 | 29 5/16 | 7 11/16 | | |
| 4017 | 4027 | 4037 | 2 1/2" Rolled | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 5 3/8* | 22 5/16 | 29 5/16 | 6 7/16* | | |
| 4012 | 4022 | 4032 | 4" Rolled, Flush Pull | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 4 1/8* | 22 5/16 | 29 5/16 | 5 1/8* | | |
| 4018 | 4028 | 4038 | 4 1/2" Rolled | 20 | 27 | 7 3/4 | 23 3/8 | 30 3/8 | 21 | 28 | 3 3/8* | 22 5/16 | 29 5/16 | 4 7/16* | | |
| 4013 | 4023 | 4033 | Surf. Mtd. | 23 3/16 | 30 3/16 | 8 1/4 | 23 3/8 | 30 3/8 | -- | -- | -- | -- | -- | -- | | |
| Dimensions in Inches | | | | | | | | | | | | | | | | |

Dimensions in Inches

‡ TRIMLESS MODELS FEATURE NEW DESIGN AND MAY BE INSTALLED BEFORE DRYWALL - SEE SUBMITTAL AND INSTALLATION INFORMATION*ADD 5/8" FOR CABINETS WITH ALUMINUM FRAMES.

**COSMIC 20 & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.

CLEAR VU SERIES: ACRYLIC BUBBLE CABINET IN ALUMINUM, STEEL, STAINLESS, BRONZE OR BRASS

Door and Trim Construction: Cold rolled steel with white powder coat finish, #4 stainless steel, clear anodized aluminum, US10 satin bronze, or US3 polished brass. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Bubble: Acrylic bubble allows 180° extinguisher visibility. 2 1/2" projection for 1500 Series, 3 1/2" projection for 2500 and 4500 Series.

Trim Style and Depth: Recessed - 3/8" flat trim, Semi-Recessed - 1 1/4", 1 1/2" Square Edge and 2 1/2" or, 3" Rolled Edge. Surface-mount has a square edge or optional rolled edge for steel or stainless steel upon request. 1 3/4" face trim on frame and 1 1/4" trim on door. 2527 rolled edge constructed of aluminum extrusions.

Tub: Constructed of cold rolled steel with white powder-coat finish standard. Extinguisher must be mounted to back of tub using bracket.

Fire-Rated Option Available: Yes

Door Styles w/Pull

F Full Glazing

G Full Glazing & SAF-T-LOK™

Options at Additional Cost

Aluminum Tub for Aluminum Cabinets Only (Non-Rated Use)

Color Painted Tub (Red or Black)

Color Dark Anodized Aluminum

Vertical or Horizontal Lettering. See Page 21.

Futura Embossed "Fire" Handle - Mill or White

Engraved Metal Door or Etched Glass


US 9 Bright Polished Bronze

US 4 Satin Brass

US 10B Dark Oxidized Oil-Rubbed Bronze

Wall Signs and Alarms. See Page 20

TOP VIEW

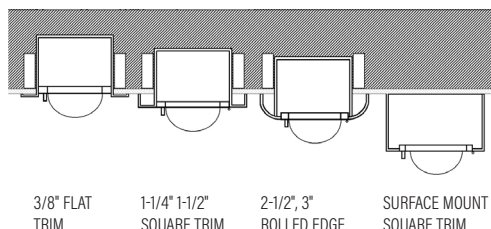

CLEAR VU
1537G25
WITH SAF-T-LOK™


Bubble

25 Clear Acrylic

26 Red Acrylic*

27 Bronze Acrylic

*for 1500 models only

| Door Material and Series # | | | | | | Tub I.D. | | | Frame O.D. | | Wall Opening: Non-Rated | | | Wall Opening: FX2 Option | | |  | Accommodates Following Extinguishers |
|----------------------------|-----------|--------------------|--------|-------|---------------------------|----------|---------|-------|------------|--------|----------------------------|----|--------|-----------------------------|---------|----------|---|--|
| Steel | Aluminum* | Stainless Steel | Bronze | Brass | Trim Style | A | B | C | E | F | W | H | D | W | H | D | | |
| 1515 | 1525 | 1535 | 1545 | 1555 | Flat Trim | 10 1/2 | 24 | 4 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 3 7/8 | 12 13/16 | 26 5/16 | 4 15/16 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 | |
| 1516 | 1526 | 1536 | 1546 | 1556 | 1 1/2" Square | 10 1/2 | 24 | 4 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 2 5/8 | 12 13/16 | 26 5/16 | 3 11/16 | | |
| 1517 | 1527 | 1537 | 1547 | 1557 | 3" Rolled | 10 1/2 | 24 | 4 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 1 1/8 | 12 13/16 | 26 5/16 | 2 3/16 | | |
| 1513 | 1523 | 1533 | 1543 | 1553 | Surf. Mtd. | 13 11/16 | 27 3/16 | 4 5/8 | 13 7/8 | 27 3/8 | -- | -- | -- | -- | -- | -- | | |
| 2515 | 2525 | 2535 | 2545 | 2555 | Flat Trim | 14 | 30 | 4 | 17 3/8 | 33 3/8 | 15 | 31 | 3 7/8 | 16 5/16 | 32 5/16 | 4 15/16 | Cosmic & Galaxy 2.5-10, Cosmic 20A, Mercury 2.5-15 (FM1A & 15A), Sentinel 5 Saturn 15-25, Grenadier P | |
| 2516 | 2526 | 2536 | 2546 | 2556 | 1 1/4" Square | 14 | 30 | 4 | 17 3/8 | 33 3/8 | 15 | 31 | 2 7/8 | 16 5/16 | 32 5/16 | 3 15/16 | | |
| 2517 | 2527* | 2537 | -- | -- | 2 1/2" Rolled | 14 | 30 | 4 | 17 3/8 | 33 3/8 | 15 | 31 | 1 5/8* | 16 5/16 | 32 5/16 | 2 11/16* | | |
| 2513 | 2523 | 2533 | 2543 | 2553 | Surf. Mtd. | 17 3/16 | 33 3/16 | 4 5/8 | 17 3/8 | 33 3/8 | -- | -- | -- | -- | -- | -- | | |
| 4515 | 4525 | 4535 | -- | -- | Flat Trim Double Door | 28 | 30 | 4 | 31 3/8 | 33 3/8 | 29 | 31 | 3 7/8 | -- | -- | -- | Two each Cosmic & Galaxy 2.5-10, Mercury 2.5-15 (FM1A & 15A), Sentinel 5, Grenadier P | |
| 4513 | 4523 | 4533 | -- | -- | Surf. Mtd. Double Door | 31 3/16 | 33 3/16 | 4 5/8 | 31 3/8 | 33 3/8 | -- | -- | -- | -- | -- | -- | | |
| Dimensions in Inches | | | | | | | | | | | | | | | | | | |

Dimensions in Inches

*ADD 5/8" TO WALL DEPTH FOR A CABINET WITH AN ALUMINUM FRAME. 4500 SERIES CONSIST OF A DOUBLE DOOR DESIGN.

SMB SERIES: SURFACE-MOUNTED ACRYLIC BUBBLE AND STEEL CABINET

Door and Trim Construction: Cold rolled steel with six standard powder-coated colors to choose from - black, white, red, bronze, brass, silver or gray hammertone. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. Custom powder-coat finishes available upon request. See page 24.


Bubble: Acrylic bubble allows 180° extinguisher visibility. 2-1/2" projection.

Trim Style and Depth: This surface-mounted cabinet has a 3" rolled edge that forms a tub. 3" deep tub constructed of cold rolled steel with white powder-coat finish standard. 1 3/4" face trim on frame and 1 1/4" trim on door.

Extinguisher: Extinguisher must be mounted to back of tub using bracket.

Fire-Rated Option Available: No

Options at Additional Cost: Vertical or Horizontal Lettering. See Page 21.



SMB-W25
WHITE



SMB-BRA27
BRASS



SMB-H25
GRAY HAMMERTONE

Door Finishes

B Black

W White

R Red

GH Gray Hammertone

BR Bronze

BRA Brass

SI Silver

Door Glazing

25 Clear Acrylic

26 Red Acrylic

27 Bronze Acrylic

| Model | | | | | | | Frame Inside Dimensions | Frame Outside Dimensions | Accommodates Following Extinguishers |
|-------|------------|---------|--------|--------|-------|-------|----------------------------|-----------------------------|---|
| White | Hammertone | Brass | Bronze | Silver | Red | Black | | | |
| SMB-W | SMB-GH | SMB-BRA | SMB-BR | SMB-SA | SMB-R | SMB-B | 13 13/16 x 27 5/16 | 13 15/16 x 27 7/16 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5 |

Dimensions in Inches



FIRE EXTINGUISHER CABINETS

EMBASSY SERIES: DECORATIVE TRIMLESS RECESSED CABINET

Door and Trim Construction: These 7/8" formed design cabinet doors are available in # 4 satin stainless steel, US 10 satin bronze, US 3 polished brass, clear anodized aluminum or or white powder coated steel. Doors feature two concealed hinges and concealed handle and roller catch.

Trim Style and Depth: None

Tub: Constructed of cold rolled steel with white powder-coat finish standard.

Unique Options: The 5900 Series is equipped with a shelf 12" from the bottom. Knockouts are located 6" from the bottom and 4 1/4" from the back on both the right- and left-hand sides.


Fire-Rated Option Available: Yes



EMBASSY 5634S21FX2



EMBASSY 5654V15

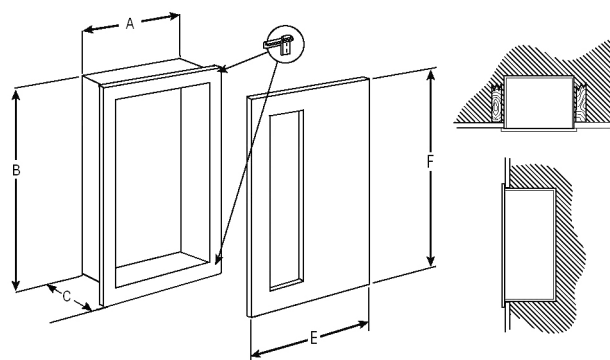

Door Styles

- S21** Solid
- L22** Solid & SAF-T-LOK™
- V** Vertical Duo
- W** Vertical Duo & SAF-T-LOK™

Door Glazing

- 10** Clear Acrylic
- 13** Clear Wire Glass w/ Safety Film
- 15** Bronze Acrylic
- 16** Gray Acrylic
- 17** Clear Tempered Glass
- 18** Laminated Safety Glass

Options at Additional Cost

- Color Painted Door or Tub - Steel Only
- Vertical or Horizontal Lettering. See Page 21
- Futura Embossed "Fire" Handle - Mill or White
- Wall Signs and Alarms, See Page 20
- Color Anodized Aluminum, See Page 24
- #6 Satin, #7 Polished, #8 Mirror Stainless
- US9 Polished Bronze Door - Clear Coated
- US10B Oil-Rubbed Bronze Door
- US4 Satin Brass Door - Clear Coated
- Etched Lettering in Glass, Engraved Lettering

| Door Material and Series # | | | | | Tub I.D. | | | Door O.D.* | | Wall Opening: Non-Rated | | | Wall Opening: FX2 Option | | | | Accommodates Following Extinguishers & Valves |
|---|----------|--------------------|--------|-------|----------|----|-------|----------------------|----------------------|----------------------------|----|-------|-----------------------------|---------|---------|--|--|
| Steel | Aluminum | Stainless Steel | Bronze | Brass | A | B | C | E | F | W | H | D | W | H | D | | |
| 5614 | 5624 | 5634 | 5644 | 5654 | 10 1/2 | 24 | 5-3/4 | 12 3/4 13 3/4 FX2 | 26 1/4 27 1/4 FX2 | 11 1/2 | 25 | 5 7/8 | 12 13/16 | 26 5/16 | 6 15/16 | | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 5714 | 5724 | 5734 | 5744 | 5754 | 16 | 32 | 7 3/4 | 18 1/4 19 1/4 FX2 | 34 1/4 35 1/4 FX2 | 17 | 33 | 7 7/8 | 18 5/16 | 34 5/16 | 8 15/16 | | Any Cosmic*, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5-15, 272 |
| Fire Department Valve, Hose & Extinguisher Cabinets | | | | | | | | | | | | | | | | | |
| 5514 | 5524 | 5534 | 5544 | 5554 | 18 | 18 | 7 3/4 | 20 1/4 21 1/4 FX2 | 20 1/4 21 1/4 FX2 | 19 | 19 | 7 7/8 | 20 5/16 | 20 5/16 | 8 15/16 | | 1-1/2" or 2-1/2" Fire Department Valve Left & Right K.O.'s 9" from top, 4" from back**† |
| 5814 | 5824 | 5834 | -- | -- | 32 | 32 | 7 3/4 | 34 1/4 35 1/4 FX2 | 34 1/4 35 1/4 FX2 | 33 | 33 | 7 7/8 | 34 5/16 | 34 5/16 | 8 15/16 | | 1-1/2" or 2-1/2" Rack Unit & 2-1/2" Fire Department Valve or Extinguisher. Left K.O. 4" from back, top & bottom.**† |
| 5914 | 5924 | 5934 | 5944 | 5954 | 16 | 40 | 8 3/4 | 18 1/4 19 1/4 FX2 | 42 1/4 43 1/4 FX2 | 17 | 41 | 8 7/8 | 18 5/16 | 42 5/16 | 9 15/16 | | 2-1/2" Fire Department Valve & Fire Extinguisher Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 |
| Dimensions in Inches | | | | | | | | | | | | | | | | | |

*COSMIC & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.

**KNOCKOUTS NOT AVAILABLE STAINLESS TUBS

†KNOCKOUTS NOT AVAILABLE ON FIRE-RATED CABINETS

ALL MODELS SHOWN ON THIS PAGE MEET THE ADA 4" PROJECTION REQUIREMENT

CAVALIER SERIES: DECORATIVE BRONZE OR BRASS CABINET

Door and Trim Construction: Standard finishes are US10 satin bronze or US3 polished brass. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Trim Style and Depth: Recessed - 3/8" flat trim. Semi-Recessed - 1 1/4", 1 1/2" Square Edge or 3" Rolled Edge. Surface-mount has a square edge. 1 3/4" face trim on frame and 1 1/4" trim on door.

Tub: Constructed of cold rolled steel with white powder-coat finish standard. Surface mounted models have brass or bronze tubs.

Unique Options: Large selection of Bronze and Brass finishes.


Fire-Rated Option Available: Yes

Door Styles w/Pull


- F** Full Glazing
- G** Full Glazing & SAF-T-LOK™
- D** Horizontal Duo Panel
- E** Horizontal Duo Panel & SAF-T-LOK™
- S21** Solid
- L22** Solid & SAF-T-LOK™
- L24** Solid with Cylinder Lock & No Handle
- B10** Solid with 2" x 4" Acrylic Insert & SAF-T-LOK™
- V** Vertical Duo
- W** Vertical Duo & SAF-T-LOK™

Door Glazing

- 10** Clear Acrylic
- 13** Clear Wire Glass w/ Safety Film
- 15** Bronze Acrylic
- 16** Gray Acrylic
- 17** Clear Tempered Glass
- 18** Laminated Safety Glass



TOP VIEW

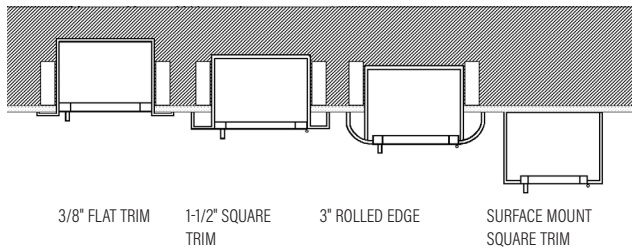

1845W10



1085 (US10B BRONZE)
FINISH & WHITE LETTERING



1047S21



1857V10

Options at Additional Cost

Vertical or Horizontal Lettering - See Page 21

Futura Embossed "Fire" Handle in Mill, White or Red

Pulls - Flush, Bronze, Brass. See page 20

Wall Signs, Labels & Alarms- See Page 20

Panorama-Style Full Acrylic Door - See page 8

Optional Standard Color Frame/Door/Tub - see Page 24

Optional Color tub - see page 24

Etched Glass Lettering See page 21

Bronze: US9 Bright Polished, US10B Oil-rubbed Finishes

Brass: US4 Satin Finish

| Trim and Door Material and Series # | | | | Tub I.D. | | | Trim O.D.* | | Wall Opening: Non-Rated | | | Wall Opening: FX2 Option | | | Accommodates Following Extinguishers |
|-------------------------------------|------------------|-------|----------------|----------|---------|-------|------------|--------|-------------------------|----|-------|--------------------------|---------|---------|--|
| US10 Satin Bronze | US10B Oil-rubbed | Brass | Trim Style | A | B | C | E | F | W | H | D | W | H | D | |
| 1845 | 1885 | 1855 | Flat Trim* | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 5 3/8 | 12 13/16 | 26 5/16 | 6 7/16 | Cosmic & Galaxy 2.5-6, Mercury 2.5 & 5 (Mount 6lb to tub) |
| 1846 | 1886 | 1856 | 1 1/2" Square* | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 4 1/8 | 12 13/16 | 26 5/16 | 5 3/16 | |
| 1847 | 1887 | 1857 | 3" Rolled* | 10 1/2 | 24 | 5 1/2 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 2 5/8 | 12 13/16 | 26 5/16 | 3 5/8 | |
| 1045 | 1085 | 1055 | Flat Trim* | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 5 7/8 | 12 13/16 | 26 5/16 | 6 15/16 | Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5, Sentinel 5 |
| 1046 | 1086 | 1056 | 1 1/2" Square* | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 4 5/8 | 12 13/16 | 26 5/16 | 5 11/16 | |
| 1047 | 1087 | 1057 | 3" Rolled* | 10 1/2 | 24 | 6 | 13 7/8 | 27 3/8 | 11 1/2 | 25 | 3 1/8 | 12 13/16 | 26 5/16 | 4 | |
| 1043 | 1083 | 1053 | Surf. Mt. | 13 11/16 | 27 3/16 | 6 1/2 | 13 7/8 | 27 3/8 | -- | -- | -- | -- | -- | -- | Any Cosmic*, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 & 10 |
| 2045 | 2085 | 2055 | Flat Trim* | 12g | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 7 5/8 | 14 5/16 | 29 5/16 | 8 11/16 | |
| 2046 | 2086 | 2056 | 1 1/4" Square* | 12 | 27 | 7 3/4 | 15 3/8 | 30 3/8 | 13 | 28 | 6 5/8 | 14 5/16 | 29 5/16 | 7 11/16 | |
| 2043 | 2083 | 2053 | Surf. Mt. | 15 3/16 | 30 3/16 | 8 1/4 | 15 3/8 | 30 3/8 | -- | -- | -- | -- | -- | -- | |

Dimensions in Inches

*COSMIC 20 & GALAXY 20 EXTINGUISHER MUST BE MOUNTED ON THE BACK OF THE CABINET TUB.



FIRE EXTINGUISHER CABINETS

CLASSIC SERIES: ECONOMY GALVANIZED FIRE EXTINGUISHER CABINETS

Tub and Door Frame: White powder-coated cabinet rust resistant galvanized steel, or aluminum.

Door: .060 acrylic front for protection from the elements. Breaker bar and lock standard.

Options at Additional Cost: Optional colors. Wall signs and labels, See Page 21.

Fire-Rated Option: No

| Trim and Door Material New Model# | | | Previous Model Number | Tub I.D. | | | Wall Opening | | | Approx Weight Per Carton | Units Per Carton | Accommodates Following Extinguishers |
|-----------------------------------|----------|------------|-----------------------|----------|----------|-------|--------------|---------|-------|--------------------------|------------------|--|
| Gal. Steel | Aluminum | Trim Style | | W | H | D | W | H | D | | | |
| 9163Z30 | 9123Z30 | Surf. Mtd. | 99G | 8 1/2 | 19 13/16 | 6 1/4 | -- | -- | -- | 16 | 2 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5, Sentinel 5 |
| 916AZ30 | 912AZ30 | 2 3/4 | 99GT | 8 1/2 | 19 13/16 | 6 1/4 | 9 | 20 5/16 | 3 3/4 | 20 | 2 | |
| 9263Z30 | 9223Z30 | Surf. Mtd. | 999G | 9 1/2 | 25 3/4 | 6 1/4 | -- | -- | -- | 20 | 2 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 926AZ30 | 922AZ30 | 2 3/4 | 999GT | 9 1/2 | 25 3/4 | 6 1/4 | 10 | 26 1/4 | 3 3/4 | 24 | 2 | |
| 936AZ30 | 932AZ30 | 4 1/2 | 104GT | 10 1/2 | 29 3/4 | 8 1/4 | 11 | 30 1/4 | 4 | 14 | 1 | Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 |
| 9363Z30 | 9323Z30 | Surf. Mtd. | 104G | 10 1/2 | 29 3/4 | 8 1/4 | -- | -- | -- | 18 | 1 | |

Dimensions in Inches

SLIDE TRIM WITH LESS THAN 4" EXPOSURE MEETS ADA REQUIREMENTS.

ECONOMYLINE SERIES: ECONOMY SURFACE-MOUNTED

Construction: Gray Hammertone powder coated cabinet cold rolled steel tub or rust-resistant aluminum.

Door: Sliding .060 clear acrylic front with retainer clip. Breaker bar with chain, pre-drilled holes on top lip for padlock.

Options at Additional Cost: Other colors, brass padlock, Abus padlock. Wall signs and labels, See Page 21.

Fire-Rated Option: No

| Trim and Door Material New Model # | | | Previous Model Number | Tub I.D. | | | Approx Weight Per Carton | Units Per Carton | Accommodates Following Extinguishers |
|------------------------------------|----------|------------|-----------------------|----------|----|-------|--------------------------|------------------|--|
| Steel | Aluminum | Trim Style | | W | H | D | | | |
| 5013N20 | 5023N20 | Surf. Mtd. | 818 | 8 1/8 | 18 | 5 1/2 | 11 | 2 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 |
| 5113N20 | 5123N20 | Surf. Mtd. | 924 | 9 1/8 | 24 | 5 1/2 | 16 | 2 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 5213N20 | 5223N20 | Surf. Mtd. | 1028 | 10 1/8 | 28 | 8 1/4 | 26 | 2 | Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 |

Dimensions in Inches

ABS SERIES: DURABLE, SURFACE-MOUNTED ABS PLASTIC

Construction: The ABS Series is constructed of injection-molded ABS plastic for a dent, rust and corrosion-proof protection for your fire extinguishers. These impact-resistant cabinets include brass lock, cover and labels.

Note: The height dimension includes padlock tab.

Fire-Rated Option: No



| Model | Tub Size | Cabinet Color | Cover Color | Environment | Accommodates Following Extinguishers |
|----------|------------------------|---------------|-------------|----------------|---|
| | Height, Width, & Depth | | | | |
| ABS 16RR | 16 x 8 1/2 x 5 3/8 | Red | Red | Indoor/Outdoor | Cosmic & Galaxy 2.5-5, Mercury 2.5-5 |
| ABS 16RC | 16 x 8 1/2 x 5 3/8 | Red | Clear | Indoor | |
| ABS 16WR | 16 x 8 1/2 x 5 3/8 | White | Red | Indoor | |
| ABS 16WC | 16 x 8 1/2 x 5 3/8 | White | Clear | Indoor | Cosmic & Galaxy 2.5-6, Mercury 2.5-5, Sentinel 5 |
| ABS 20RR | 19 1/2 x 9 5/8 x 6 3/8 | Red | Red | Indoor/Outdoor | |
| ABS 20RC | 19 1/2 x 9 5/8 x 6 3/8 | Red | Clear | Indoor | |
| ABS 20WR | 19 1/2 x 9 5/8 x 6 3/8 | White | Red | Indoor | |
| ABS 20WC | 19 1/2 x 9 5/8 x 6 3/8 | White | Clear | Indoor | |
| ABS 24RR | 23 1/4 x 9 5/8 x 6 3/8 | Red | Red | Indoor/Outdoor | Cosmic 2.5-10, Galaxy 2.5-10, Mercury 2.5-5, Mercury 11 (FM11A), Mercury 15 1/2 (FM15A), Sentinel 5 |
| ABS 24RC | 23 1/4 x 9 5/8 x 6 3/8 | Red | Clear | Indoor | |
| ABS 24WR | 23 1/4 x 9 5/8 x 6 3/8 | White | Red | Indoor | |
| ABS 24WC | 23 1/4 x 9 5/8 x 6 3/8 | White | Clear | Indoor | |

Dimensions in Inches



916AZ30



9163Z30 SURFACE MOUNT MODEL



ECONOMYLINE
5113N20



DECORLINE SERIES: ECONOMY STEEL OR ALUMINUM

The Decorline Series offers an Economical Solution for Interior or Exterior Applications. Select from a wide range of sizes that will fit most 2-1/2-10 lb extinguishers. Choose from 2 1/2", 3" or 4 5/8" trim or a surface-mounted design.

Construction: Cold rolled steel tub (interior) or aluminum (exterior) with white or gray hammertone powder-coat finish.

Trim: Models with trim feature 2" wide trim in either 2.5" or 4.25" depth, depending on model.

Door: Models with "AN" designation have slide in acrylic front secured by clips and tab for lock at top. All other models have door with continuous hinges and either solid door or door with acrylic window.

Fire-rated Option: No

Options at Additional Cost: Brass or Abus Padlock for "AN" models. Optional colors - See page 24. Wall signs and labels - See page 21.



5019G20



521AN20



5017G20



502AN20

| Trim & Door Material and Series # | | | Tub I.D. | | | | Frame O.D. | | Wall Opening | | | | Accommodates Following Extinguishers |
|-----------------------------------|----------|-------------|---|--------------|--------|--------|------------|--------|--------------|-------|--------|-------|---|
| Steel | Aluminum | Prev. Model | Door Style | Trim Style | W | H | D | W | H | W | H | D | |
| 631AN20 | -- | 928X | Slide-in Acrylic Front - No Tub | 4-3/8" Trim | 9 1/8 | 28 | 4 1/2 | 12 1/8 | 31 | 9 1/4 | 28 1/4 | -- | Cosmic & Galaxy 2.5-5.5, Mercury 2.5- 5 |
| 501AN20 | 502AN20 | 818T | Slide-in Acrylic Front w/Breaker Bar | 2 1/2" Trim | 8 1/8 | 18 | 5 1/2 | 11 1/4 | 21 1/4 | 9 | 19 | 4 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 |
| 511AN20 | 512AN20 | 924T | | 2 1/2" Trim | 9 1/8 | 24 | 5 1/2 | 12 1/8 | 27 | 10 | 25 | 4 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 521AN20 | 522AN20 | 1028T | | 2 1/2" Trim | 10 1/8 | 28 | 8 1/4 | 13 1/8 | 31 | 11 | 29 | 6 | Any Cosmic, Galaxy, Mercury, Saturn & Grenadier P, Sentinel 5 |
| 5218N20 | 5228N20 | 1028T4 | | 4 5/8" Trim | 10 1/8 | 28 | 8 1/4 | 13 1/8 | 31 | 11 | 29 | 4 | |
| 5017F20 | 5027F20 | 818TDH | Door w/ Continuous Hinge, Acrylic Window, Handle | 3" Trim | 8 1/8 | 18 | 5 1/2 | 11 1/4 | 21 1/4 | 9 | 19 | 3 1/4 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 |
| 5019F20 | 5029F20 | 818DH | | Surface Mtd. | 8 1/8 | 18 | 5 1/2 | 8 1/8 | 18 | -- | -- | -- | |
| 5117F20 | 5127F20 | 924TDH | | 3" Trim | 9 | 23 7/8 | 5 5/8 | 12 1/4 | 27 1/4 | 10 | 25 | 3 1/4 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 5119F20 | 5129F20 | 924DH | | Surface Mtd. | 9 | 23 7/8 | 5 5/8 | 9 1/8 | 24 | -- | -- | -- | |
| 5017G20 | 5027G20 | 818TDL | Door w/ Continuous Hinge, Acrylic Window, Handle, Saf-T-Lok | 3" Trim | 8 1/8 | 18 | 5 1/2 | 11 1/4 | 21 1/4 | 9 | 19 | 3 1/4 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 |
| 5019G20 | 5029G20 | 818DL | | Surface Mtd. | 8 1/8 | 18 | 5 1/2 | 8 1/8 | 18 | -- | -- | -- | |
| 5117G20 | 5127G20 | 924TDL | | 3" Trim | 9 | 23 7/8 | 5 5/8 | 12 1/4 | 27 1/4 | 10 | 25 | 3 1/4 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 5119G20 | 5129G20 | 924DL | | Surface Mtd. | 9 | 23 7/8 | 5 5/8 | 9 1/8 | 24 | -- | -- | -- | |
| 5017S21 | 5027S21 | 818TDHS | Solid Door w/ Continuous Hinge, Handle | 3" Trim | 8 1/8 | 18 | 5 1/2 | 11 1/4 | 21 1/4 | 9 | 19 | 3 1/4 | Cosmic & Galaxy 2.5-6, Mercury 2.5-5 |
| 5019S21 | 5029S21 | 818DHS | | Surface Mtd. | 8 1/8 | 18 | 5 1/2 | 8 1/8 | 18 | -- | -- | -- | |
| 5117S21 | 5127S21 | 924TDHS | | 3" Trim | 9 | 23 7/8 | 5 5/8 | 12 1/4 | 27 1/4 | 10 | 25 | 3 1/4 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 5119S21 | 5129S21 | 924DHS | | Surface Mtd. | 9 | 23 7/8 | 5 5/8 | 9 1/8 | 24 | -- | -- | -- | |

Dimensions in Inches



FIRE EXTINGUISHER CABINETS

LOW PROFILE CABINETS FOR ORBIT FE10V EXTINGUISHERS

Construction: Cold rolled steel with white powder-coated finish, anodized aluminum, stainless steel with # 4 finish, US3 polished brass or US10 satin finish bronze.

Door: Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and roller catch. Recessed models are equipped with zinc-plated handle and surface mount have flush pull handle. All models have 1-3/4" wide trim on frame and 1-1/4 trim on doors with glazing. Doors with glazing have clear acrylic glazing.

Tub: Constructed of cold rolled steel with white powder-coat finish Tub fits only the Orbit model FE10V (Oval model 10JABC) extinguisher

Fire-Rated Option: Yes

Door Styles

| | | | |
|-----|-----------------------------------|-----|--------------------------------------|
| F10 | Full Glazing | L22 | Solid with Saf-T-Lok™ |
| G10 | Full Glazing & saf-t-Lok™ | L24 | Solid with Cylinder Lock & No Handle |
| D10 | Horizontal Duo Panel | V10 | Vertical Duo |
| E10 | Horizontal Duo Panel & saf-t-lok™ | W10 | Vertical Duo & Saf-T-Lok™ |
| S21 | Solid, No Glazing | | |

Options at Additional Cost

Futura Embossed "Fire" Handle in Mill, White or Red
Wall Signs & Alarms - See Page 20
Red, Silver or Black Painted Steel Tub



2115G10



ORBIT LOW
PROFILE
EXTINGUISHERS

| Model # | Material | Trim Style | Tub I.D. | | | Frame O.D. | | Wall Opening | | | WALL OPENING FX2 OPTION | | | |
|----------------------|--------------------|----------------|----------|--------|-------|------------|--------|--------------|----|-------|----------------------------|---------|-------|--|
| | | | W | H | Depth | W | H | W | H | D | W | H | D | |
| 2115 | Steel | 3/8" Flat Trim | 12 | 27 | 3-1/4 | 15-3/8 | 30-3/8 | 13 | 28 | 3-1/8 | 14 5/16 | 29 5/16 | 4 1/4 | |
| 2125 | Aluminum | 3/8" Flat Trim | 12 | 27 | 3-1/4 | 15-3/8 | 30-3/8 | 13 | 28 | 3-1/8 | 14 5/16 | 29 5/16 | 4 1/4 | |
| 2135 | Stainless Steel | 3/8" Flat Trim | 12 | 27 | 3-1/4 | 15-3/8 | 30-3/8 | 13 | 28 | 3-1/8 | 14 5/16 | 29 5/16 | 4 1/4 | |
| 2119 | Steel | Surface Mount | 15-3/8 | 30-3/8 | 3-1/4 | 15-3/8 | 30-3/8 | -- | -- | -- | -- | -- | -- | |
| 2139 | Stainless Steel | Surface Mount | 15-3/8 | 30-3/8 | 3-1/4 | 15-3/8 | 30-3/8 | -- | -- | -- | -- | -- | -- | |
| 2145 | US10 Satin Bronze | 3/8" Flat Trim | 12 | 27 | 3-1/4 | 15-3/8 | 30-3/8 | 13 | 28 | 3-1/8 | 14 5/16 | 29 5/16 | 4 1/4 | |
| 2155 | US3 Polished Brass | 3/8" Flat Trim | 12 | 27 | 3-1/4 | 15-3/8 | 30-3/8 | 13 | 28 | 3-1/8 | 14 5/16 | 29 5/16 | 4 1/4 | |
| Dimensions in Inches | | | | | | | | | | | | | | |

SM SERIES: ECONOMICAL SURFACE-MOUNT ALUMINUM CABINET

Construction: All aluminum with white powder coat finish standard. Cabinet is hinged on top and plexiglass front slides in.

Door: Full Breakaway Plexiglass, with center pull handle and tamperproof security screws.

Options: Other colors - see page 24. TSHS Spanner Tool Head Screwdriver. Wall Signs and Labels - see page 21.

Fire-Rated Option: No

Door Styles

J Center Pull Handle w/ Tamperproof Screws
G Center Pull Handle w/ Cylinder Lock

Door Glazing

30 Clear Plexiglass



SM6773J

| Model # | Previous Model # | Depth of Cabinet | Frame O.D. | | | Glazing Size | | Number | Accommodates Following Extinguishers |
|----------------------|------------------|------------------|------------|--------|------------|--------------|----------|--------|--|
| | | | W | H | Projection | W | H | | |
| 9123F | 6473 | 6 | 8 1/2 | 20 | 6 1/4 | 7 3/4 | 18 11/16 | 2 | Cosmic & Galaxy 2.5-5.5, Mercury 2.5-5 |
| 9223F | 6573 | 6 | 9 1/2 | 25 3/4 | 6 1/4 | 8 3/4 | 24 1/2 | 2 | Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 |
| 6773F* | SM-20 | 7 13/16 | 11 | 28 | 8 3/4 | 10 1/4 | 27 9/16 | 2 | Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5 |
| Dimensions in Inches | | | | | | | | | |

*Only available as J30 option

FB SERIES: FIBERGLASS FIRE EXTINGUISHER CABINET

Construction: Door and tub are UV-resistant fiberglass with high-visibility red finish and 5" x 9" Fire Extinguisher Lettering

Door: Gasketed door with 6" x 9" Gasketed view window and corrosion-resistant aluminum handle. All cabinets come standard with a full-length stainless steel hinge attached by rivets. Door is tightly latched against the silicone gasket by (2) stainless steel snap latches.

Fire-Rated Option: No

| Model | Tub Size I.D. | | | Outside Dimensions | | | Fire Extinguishers |
|----------------------|---------------|--------|--------|--------------------|--------|--------|--|
| | W | H | D | W | H | D | |
| 1353D12 | 10-1/4 | 23-1/4 | 8-1/2 | 13-1/4 | 26-1/8 | 9-3/4 | Cosmic and Galaxy 2-1/2-10, Cosmic 20E (FE20C), any Mercury, Saturn 15 |
| 1363D12 | 12-1/2 | 24-1/8 | 9 | 15-3/4 | 27-1/8 | 10-1/4 | Any Cosmic, Galaxy, Mercury, Saturn 15, Grenadier, Sentinel 5-10 |
| 1373D12 | 16 | 33 | 12-3/4 | 19-5/8 | 36-1/8 | 14 | Any Cosmic, Galaxy, Mercury, Saturn, Grenadier, Sentinel |
| Dimensions in Inches | | | | | | | |





SECURITY AND DETENTION CABINETS

JL security and detention cabinets for fire extinguishers, fire hoses or fire department valves are constructed to meet maximum security requirements in areas where fire protection is required. All recessed models have heavy-duty masonry anchors welded to the frame.

Door, Tub and Trim: 12 gauge steel with white powder coat finish, or 14 gauge #4 satin stainless finish. Flush cabinet doors are mounted in a 1" door stop and attached by a heavy-duty continuous hinge. Choose from 3 standard lock preps, or see lock options below for more choices.

Trim Style and Depth: 1-1/4" trim on frame non-rated, 1-1/2" trim on fire-rated frames. Available in Recessed with flat trim, Semi-recessed with 2-1/2" square trim or Surface-mount model with square edge. Heavy duty masonry anchors are welded to frame on all recessed cabinets.

Lock: Detention deadlock prep (DDP) provided standard. Optional lock preps at no charge are detention deadlock prep (DDP) or mortise cylinder prep (MCP).

Fire-Rated Option Available: Yes.

Options At Additional Cost: Vertical or Horizontal Lettering Pg 21, Optional Colors for Steel Cabinets. See Pg 24.

Lock Options At Additional Cost: Installed detention deadlock, slam lock, or mortise cylinder. Mortise deadbolt prep (MDP) or with lock installed.




SFC 15 W/DETENTION DEADBOLT



SSFC-37 W/DETENTION DEADBOLT



SVC-13 W/OPTIONAL COLOR

| TRIM & DOOR MATERIAL & SERIES | | | TUB I.D. | | | *FRAME O.D. | | WALL OPENING NON-RATED | | | WALL OPENING FX2 OPTION | | |  | RECOMMENDED EXTINGUISHER, HOSE & RACK |
|---|-----------|------------------|----------|--------|-------|-------------|--------|---------------------------|--------|-------|----------------------------|--------|-------|--|--|
| STEEL | STAINLESS | TRIM STYLE | W | H | D | W | H | W | H | D | W | H | D | | |
| SECURITY FIRE EXTINGUISHER CABINETS (SFC) | | | | | | | | | | | | | | | |
| SFC-11 | SSFC-31 | Flat Trim | 10 1/2 | 24 | 7 | 12 1/2 | 26 | 11 1/2 | 25 | 7 1/2 | 12 1/2 | 26 1/2 | 8 | Cosmic & Galaxy 2.5-10, Mercury 2.5 & 5** | |
| SFC-12 | SSFC-32 | 2-1/2" Sqr. Trim | 10 1/2 | 24 | 7 | 12-1/2 | 26 | 11 1/2 | 25 | 5 | 12 1/2 | 26 1/2 | 5 1/2 | | |
| SFC-13 | SSFC-33 | Surface Mt. Sq. | 13 | 26-1/2 | 8 | 13 | 26 1/2 | -- | -- | -- | -- | -- | -- | | |
| SFC-15 | SSFC-35 | Flat Trim | 12 | 27 | 8 1/2 | 14 | 29 | 13 | 28 | 9 | 14 | 29 1/2 | 9 1/2 | Cosmic & Galaxy 2.5-20, Mercury 2.5-15, Saturn 5, Sentinel 5** | |
| SFC-16 | SSFC-36 | 2-1/2" Sqr. Trim | 12 | 27 | 8 1/2 | 14 | 29 | 13 | 28 | 6-1/2 | 14 | 29 1/2 | 7 | | |
| SFC-17 | SSFC-37 | Surface Mt. Sq. | 14 1/2 | 29 1/2 | 10 | 14 1/2 | 29 1/2 | -- | -- | -- | -- | -- | -- | | |
| SECURITY VALVE CABINETS (SVC) | | | | | | | | | | | | | | | |
| SVC-11 | SSVC-31 | Flat Trim | 18 | 18 | 8 1/2 | 20 | 20 | 19 | 19 | 9 | 20 | 20 1/2 | 9 1/2 | 1-1/2" or 2-1/2" Fire Department Valve Knockouts 11 & 31: 2 each side - 5" from top, bottom and back. 12 & 32: 2 each side - 4.5" from top, bottom and back † | |
| SVC-12 | SSVC-32 | 2-1/2" Sqr Trim | 18 | 18 | 8 1/2 | 20 | 20 | 19 | 19 | 6 1/2 | 20 | 20 1/2 | 7 | | |
| SVC-13 | SSVC-33 | Surface Mt. Sq. | 20 1/2 | 20 1/2 | 10 | 20 1/2 | 20 1/2 | -- | -- | -- | -- | -- | -- | | |
| SECURITY HOSE CABINETS (SHC) | | | | | | | | | | | | | | | |
| SHC-11 | SSHC-31 | Flat Trim | 32 3/4 | 34 3/4 | 8 | 34 3/4 | 36 3/4 | 33 3/4 | 35 3/4 | 8 1/2 | 34 3/4 | 36 3/4 | 9 | 1-1/2" or 2-1/2" Hose Rack, & Extinguisher, or Fire Department Valve & Extinguisher Knockouts: 2 each side - 4" from top bottom and back† | |
| SHC-12 | SSHC-32 | 2-1/2" Sqr. Trim | 32 3/4 | 34 3/4 | 8 | 34 3/4 | 36 3/4 | 33 3/4 | 35 3/4 | 6 | 34 3/4 | 36 3/4 | 6 1/2 | | |
| SHC-13 | SSHC-33 | Surface Mt. Sq. | 36 3/4 | 38 3/4 | 8 | 36 3/4 | 38 3/4 | -- | -- | -- | -- | -- | -- | | |
| Dimensions in Inches | | | | | | | | | | | | | | | |

* FIRE RATED CABINETS - ADD 1" TO FRAME OD

**USE JL EXTINGUISHERS ONLY IN THIS CABINET.

†KNOCKOUTS NOT AVAILABLE ON FIRE-RATED CABINETS

SCHOOL CABINETS

Door and Trim: 12 gauge steel or 14 gauge stainless steel door with tempered glass is mounted in a 5/8" door stop, attached by a continuous hinge and equipped with zinc-plated handle.

Trim Style: Recessed - Flat Trim. Surface mount and semi-recessed models have a square edge.


Tub: 16 gauge steel with white powder-coated primer. Stainless steel models have stainless tub. Masonry anchors standard.

Options at Additional Cost: Duo panel or solid door, polycarbonate glazing, Flush pull, SAF-T-LOK, lettering - see page 21.

Fire-Rated Option Available: Yes



SCHOOL CABINET CS2015F

| Model | | Tub I.D. | | | *Frame O.D. | | Wall Opening: Non-Rated | | | Wall Opening: FX2 Option  | | | Accommodates Following Extinguishers |
|----------------------|--------------|----------|--------|-------|-------------|--------|----------------------------|----|-------|---|----|-------|---|
| Steel | Trim Style | W | H | D | W | H | W | H | D | W | H | D | |
| CS2015 | Flat Trim | 12 | 27 | 7 3/4 | 14 | 29 | 13 | 28 | 8 | 14 | 29 | 8 3/4 | Any Cosmic, Galaxy, Mercury, Saturn & Grenadier P, Sentinel 5-10 |
| CS2017 | 2 1/2 Square | 12 | 27 | 7 3/4 | 14 | 29 | 13 | 28 | 5 1/2 | 14 | 29 | 6 1/2 | |
| CS2013 | Surf. Mtd. | 14 1/2 | 29 1/2 | 8 | 14 1/2 | 29 1/2 | -- | -- | -- | -- | -- | -- | |
| Dimensions in Inches | | | | | | | | | | | | | |

*FIRE RATED CABINETS - ADD 1" TO FRAME OD.



EMERGENCY SPECIALTIES

FREESTANDING AED CABINET STAND: 1480 SERIES



This Decorative Stand with a Surface-Mount Steel or Aluminum Cabinet can be an Attractive Addition to a Building's Décor by Coordinating Finishes and Paint Colors.

Construction: 52" structural steel tubing and steel baseplate. White epoxy or silver metallic finish standard, with custom colors also available.

DUAL CABINET FOR AED AND EMERGENCY OXYGEN: OLYMPUS 1900 SERIES

Provide More Lifesaving Equipment by Including Emergency Oxygen with Your AED.

Door & Trim Construction: CRS with white powder-coat finish, #4 stainless steel or clear anodized aluminum. 1-3/4" trim on face and door, mounted in a 5/8" door stop and attached by a continuous hinge. All models feature a clear acrylic window with graphics, zinc-plated handle and roller catch.

Trim Style & Depth: Surface-mount has a square edge. Recessed - 3/8" flat trim, Semi-Recessed - 1-1/2" square edge or 3" rolled edge.

Alarm: 85 db Commander (audible) alarm standard.

Oxygen: Accommodates up to "D" size cylinder. Available with patented TxO2 oxygen system that features easy-to-use automatic flow system.

Tub: White powder coated CRS. Fire-rated option available.



1913F12

WEATHER-RESISTANT AED CABINETS: 1463 SERIES

Protect Your AED From Moisture and Dust with this Durable Surface-Mount Cabinet.

Construction: This AED cabinet is constructed of galvanized steel and powder coated for a durable, water resistant finish. Stainless steel turn handle and fully gasketed.



1463

AUTOMATED EXTERNAL DEFIBRILLATORS: LS-AED SERIES

All Defibrillators Meet Local and National Standards for Emergency Care in Public Places and are FDA-Approved. JL has Several Models Available Which All Feature Automatic Heartbeat Detection, Require Minimum Training to Operate and Include a Training Video.

AED CABINETS TO FIT MOST BRANDS: 1400 LIFESTART SERIES

Designed to Accommodate Most AED's on the Market Today.

Door & Trim Construction: CRS with white powder-coat finish, #4 stainless steel or clear anodized aluminum. 1-3/4" trim on face. Formed door with 1-3/4" trim, mounted in a 5/8" door stop with zinc-plated handle and roller catch and continuous hinge. View AED through a clear acrylic window with graphics.

Trim Style & Depth: Surface-mount has a square edge. Recessed - 3/8" flat trim, Semi-Recessed - 1-1/2" square edge or 3" rolled edge.

Alarm: 85 db Commander (audible) alarm standard.

Tub: White powder-coated CRS. Fire-rated available.



1413F12SA

METAL AED CABINET OPTIONS AND ACCESSORIES

Siren Strobe Alarm and 85 db Alarm for 3" and surf mtd.(9V battery) (SA)

Alarm Connectivity Switch: Magnetic

Door contact (14MAG) or Roller Reed

Contact (14RR).

Optimal door styles - most FEC styles available.

Saf-T-Clasp for Visual Notification if

Door has been Opened (14STC)


Custom Door Graphics



AED Wall Signs

Architectural Bronze or Brass

Custom Sizes & Paint Colors

Fire-Rated Recessed Cabinet - FX2



| Lifestart Series for Any Brand AED | | | | | | | | | | | | | | | |
|--|----------|-----------------|------------------|----------|---------|-------|------------|--------|------------------------|--------|--------|--------------------------------|---------|----------|---|
| Trim and Door Material and Series # | | | | Tub I.D. | | | Frame O.D. | | Wall Opening Non-Rated | | | Wall Opening Fire-Rated Option | | |  |
| Steel | Aluminum | Stainless Steel | Trim Style | A | B | C | E | F | W | H | D | W | H | D | |
| 1415F12 | 1425F12 | 1435F12 | 3/8 Flat Trim | 14 | 14 | 6 3/4 | 17 3/8 | 17 3/8 | 15 1/4 | 15 1/4 | 6 1/2 | 16 5/16 | 16 5/16 | 7 11/16 | |
| 1416F12 | 1426F12 | 1436F12 | 1 1/2 Square | 14 | 14 | 6 3/4 | 17 3/8 | 17 3/8 | 15 1/4 | 15 1/4 | 5 7/8 | 16 5/16 | 16 5/16 | 6 7/16 | |
| 1417F12 | 1427F12 | 1437F12 | 3or 2 1/2"Rolled | 14 | 14 | 6 3/4 | 17 3/8 | 17 3/8 | 15 1/4 | 15 1/4 | 3 3/4* | 16 5/16 | 16 5/16 | 4 15/16* | |
| 1413F12 | 1423F12 | 1439F12 | Surf. Mtd. | 17 3/16 | 17 3/16 | 7 | 17 3/8 | 17 3/8 | – | – | – | – | – | – | |
| Dimensions in Inches | | | | | | | | | | | | | | | |
| * MODEL 1427 HAS 2-1/2" TRIM & REQUIRES 5/8" DEEPER WALL OPENING | | | | | | | | | | | | | | | |
| The New Side-by-Side Olympus Series for AED & Extinguisher or Oxygen | | | | | | | | | | | | | | | |
| Trim and Door Material and Series # | | | | Tub I.D. | | | Frame O.D. | | Wall Opening Non-Rated | | | Wall Opening Fire-Rated Option | | |  |
| Steel | Aluminum | Stainless Steel | Trim Style | W | H | D | E | F | W | H | D | W | H | D | |
| 1915F12 | 1925F12 | 1935F12 | 3/8 Flat Trim | 18 | 18 | 8 | 21 3/8 | 21 3/8 | 19 | 19 | 8 | 20 5/16 | 20 5/16 | 8 15/16 | |
| 1916F12 | 1926F12 | 1936F12 | 1 1/2 Square | 18 | 18 | 8 | 21 3/8 | 21 3/8 | 19 | 19 | 6 7/8 | 20 5/16 | 20 5/16 | 7 11/16 | |
| 1917F12 | 1927F12 | 1937F12 | 3 Rolled | 18 | 18 | 8 | 21 3/8 | 21 3/8 | 19 | 19 | 5 3/4* | 20 5/16 | 20 5/16 | 6 3/16* | |
| 1913F12 | 1923F12 | 1939F12 | Surf. Mtd. | 21 3/16 | 21 3/16 | 8 1/2 | 21 3/8 | 21 1/8 | – | – | – | – | – | – | |
| Dimensions in Inches | | | | | | | | | | | | | | | |
| * MODEL 1927 HAS 2-1/2" TRIM & REQUIRES 5/8" DEEPER WALL OPENING | | | | | | | | | | | | | | | |

FIRE HOSE EQUIPMENT CABINET

This durable Storage Cabinet has CRS Steel or Galvanized Steel Construction for Interior or Exterior Use. The top is angled with a 3" overhang to shed water.

Construction: 16 gauge galvanized or cold rolled steel construction. Both are finished with red powder-coat paint and features shelf and louvers on both sides of cabinet for ventilation. Top is slightly angled and overhangs the doors by 2-7/8". Optional 12" legs.

Hardware: Hasp for a padlock (by others) standard.

Size: 58" W x 42" H x 18 1/2" D

Options: DFFH or 1403 "Fire Hose" Decal, Locking chrome handle with top & bottom latching, (must be ordered with cabinet in order to install rod latching system)


Models:

HECIG: Galvanized

HECIGL: Galvanized with Legs

HECIR: Steel

HECIRL: Steel with Legs

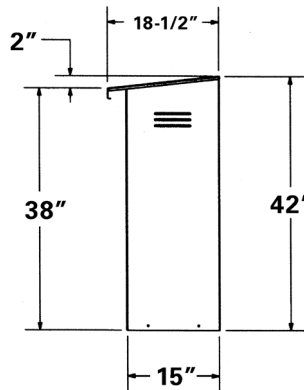

HECIGL OR HECIRL




HECIG OR HECIR

HRA SERIES: FIRE HOSE RACK ASSEMBLY

Operation: One-man operation for immediate means of fire control.

Ratings: 100 GPM at 65 PSI at the nozzle. Hose is FM-approved, Industrial Fog Nozzle, Angle Valve and Pin Rack are UL-rated. Models HRA050B-HRA100CH rated for Class II Service under NFPA/FEMA Class of service. Models HRA050B-2.5 - HRA100B-2.5 rated for Class II and Class III Service under NFPA/FEMA Class of service.

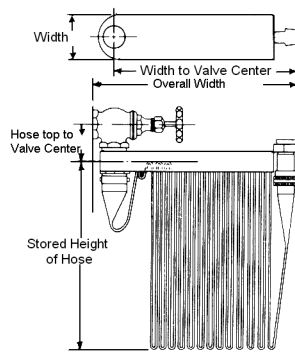

| Model # | Prev. Model # | Hose Length | Hose Diameter | Hose Type | Valve Size | Rack Length | Class of Service | Stored Height of Hose | Width of Rack | Height from Hose Top to Valve Center | Overall Width of Stored Unit to Valve Center |
|--|---------------|-------------|---------------|-----------------|------------|-------------|------------------|-----------------------|---------------|--------------------------------------|--|
| Basic Unit For 1 1/2" Hose and Valve with Single Jacket Lined Hose, Industrial Fog Nozzle, Red Enamel Pin Rack and Cast Brass Coupling, Angle Valve, Escutcheon and Nipple | | | | | | | | | | | |
| HRA050B | 3005 | 50' | 1 1/2 | Poly Lined Hose | 1 1/2 | 17 7/8 | II | 23 | 4 1/8 | 3 7/8 | 19 3/4 |
| HRA075B | 3007 | 75' | 1 1/2 | | 1 1/2 | 17 7/8 | II | 23 | 4 1/8 | 3 7/8 | 19 3/4 |
| HRA100B | 3010 | 100' | 1 1/2 | | 1 1/2 | 17 7/8 | II | 23 | 4 1/8 | 3 7/8 | 19 3/4 |
| Basic Unit Above, with Red Enamel Rack, Chrome-plated Brass Fittings and Chrome-plated Rough Brass Valve | | | | | | | | | | | |
| HRA050CH | 3105 | 50' | 1 1/2 | Poly Lined Hose | 1 1/2 | 17 7/8 | II | 23 | 4 1/8 | 3 7/8 | 19 3/4 |
| HRA075CH | 3107 | 75' | 1 1/2 | | 1 1/2 | 17 7/8 | II | 23 | 4 1/8 | 3 7/8 | 19 3/4 |
| HRA100CH | 3110 | 100' | 1 1/2 | | 1 1/2 | 17 7/8 | II | 23 | 4 1/8 | 3 7/8 | 19 3/4 |
| Basic Unit For 1 1/2" Hose and 2 1/2" Valve with Single Jacket Lined Hose, Industrial Fog Nozzle, Red Enamel Pin Rack and Cast Brass Coupling, Angle Valve, Reducer, Escutcheon and Nipple | | | | | | | | | | | |
| HRA050B-2.5 | 3205 | 50' | 1 1/2 | Poly Lined Hose | 2 1/2 | 17 7/8 | II and III | 23 | 4 1/8 | 4 1/8 | 20 1/16 |
| HRA075B-2.5 | 3207 | 75' | 1 1/2 | | 2 1/2 | 17 7/8 | II and III | 23 | 4 1/8 | 4 1/8 | 20 1/16 |
| HRA100B-2.5 | 3210 | 100' | 1 1/2 | | 2 1/2 | 17 7/8 | II and III | 25 | 4 1/8 | 4 1/8 | 20 1/16 |
| HRA125B-2.5 | 3212 | 125' | 1 1/2 | | 2 1/2 | 17 7/8 | II and III | 28 | 4 1/8 | 4 1/8 | 20 1/16 |
| SEE CROWLINE SERIES FOR CABINETS TO FIT FIRE HOSE RACK ASSEMBLIES | | | | | | | | | | | |
| Dimensions in Inches | | | | | | | | | | | |



FIRE HOSE AND VALVE CABINETS

CROWNLINE 6000-7200 SERIES: CABINETS FOR FIRE HOSES AND EXTINGUISHERS

CROWNLINE 8000 SERIES: CABINETS FOR FIRE DEPARTMENT VALVES

Door and Trim: #4 stainless steel, clear anodized aluminum or cold rolled steel with white powder-coat finish standard. 1 3/4" face trim on frame and 1 1/4" trim on door. These flush cabinet doors mounted in a 5/8" door stop, attached by a continuous hinge and equipped with zinc-plated handle and roller catch

Trim Style and Depth: Trimless Recessed - for 5/8" depth drywall or 3/4" plaster. Recessed - 3/8" flat trim. Semi-recessed 1 1/4" Square Edge or 2 1/2" Rolled Edge. Rolled edge aluminum trim is formed of extrusions. Surface mount steel and aluminum have square edge, stainless models have rolled edge with galvanized back wall. Tub of steel and aluminum surface-mounted models are same material as trim.

Tub: White powder-coated cold rolled steel. Surface-mounted stainless steel models feature a galvanized back panel.

Fire-Rated Option Available: Yes



6517V10

SHOWN IN OPTIONAL RED FINISH



6337F10



6325A10

WITH SAF-T-LOK™



6514B10FX2

WITH SAF-T-LOK™



8016F10

Door Styles with Pull

| | |
|-----|--|
| F | Full Glazing |
| G | Full Glazing & Saf-T-Lok™ |
| D | Horizontal Duo Panel |
| E | Horizontal Duo Panel & Saf-T-Lok™ |
| S21 | Solid |
| L22 | Solid with SAF-T-LOK™ |
| L24 | Solid with Cylinder Lock & No Handle |
| B10 | Solid with Acrylic Insert & Saf-T-Lok™ |
| V | Vertical Duo |
| W | Vertical Duo & Saf-T-Lok™ |
| A | Center Duo Panel with Saf-T-Lok™ |


Door Glazing

| | |
|----|--------------------------------|
| 10 | Clear Acrylic |
| 13 | Clear Wire Glass w/Safety Film |
| 15 | Bronze Acrylic |
| 16 | Gray Acrylic |
| 17 | Tempered Glass |
| 18 | Laminated Safety Glass |

Options at Additional Cost

Aluminum Tub for Non-Rated Use
Vertical or Horizontal Lettering - Pg 21
Futura Embossed "Fire" Handle in Mill, White or Red
Flush Pull
Stainless Steel Tub #4 Satin Finish (Knockouts not available)
Wall Signs & Labels - Pg 21
Color Anodized Aluminum - Pg 24
Optional Standard Color Frame/Door/Tub - Pg 24
Custom Color Frame/Door/Tub
Alarms - Pg 20
12 Gauge Security Cabinets - See Pg. 15
Custom Stainless Finishes # 6 Satin, #7 Polished, #8 Mirror
Brass or Bronze Finishes - See Embassy Series Pg. 10

TOP VIEW

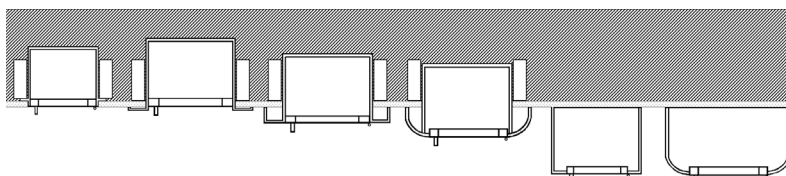

TRIMLESS
RECESSED
FLANGE FOR 5/8"
DRYWALL OR
3/4" PLASTER

3/8" FLAT TRIM

1-1/2" SQUARE
TRIM


2-1/2", 3" ROLLED
EDGE

SURFACE MOUNT
SQUARE TRIM

SURFACE MOUNT
OPTIONAL
ROLLED EDGE


Knockouts: Hose Cabinet Knockouts for Recessed and Semi-Recessed Models: Knockouts (K.O.s) are provided centered, one, side, top and bottom—other side offset, top and bottom. Cabinets with 6" depth will have K.O.'s centered. Trimless K.O.s centered only—no offset. For surface-mount cabinets knockouts are provided only when exact location is known. **See submittal for K.O. locations of each model.**

K.O.s are not provided on FIRE-FX2 cabinets or stainless tubs. Instructions for the knockouts in the field are provided and must be strictly adhered to maintain fire-rating. 8000 Series Cabinets can be ordered without shelf allow for lower mounting height of valve piping to meet NFPA10

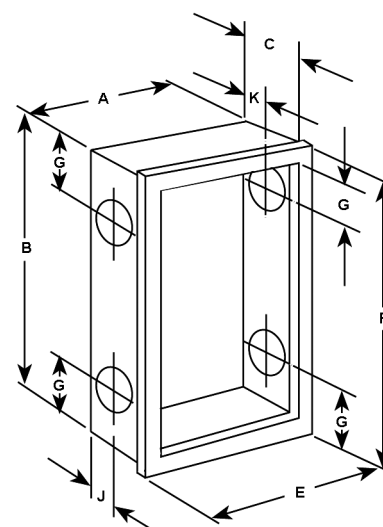

FIRE HOSE AND VALVE CABINETS



| Trim and Door Material and Series Number | | | | Tub I.D. | | | Frame O.D. | | Wall Opening: Non-Rated | | | Wall Opening: Fire-Rated | |  | Recommended Hose Rack, Valve, and Extinguishers |
|---|----------|-------------------|-------------------------|----------|----------|--------|------------|--------|-------------------------|--------|--------|--------------------------|---------|---|--|
| Steel | Aluminum | Stainless Steel** | Trim Style | A | B | C | E | F | W | H | D | W | H | D | |
| Hose with Extinguisher or FD Valve Cabinets | | | | | | | | | | | | | | | |
| 6014 | 6024 | 6034 | Trimless 5/8" Drywall ± | 24 | 30 | 6 | 27 1/8 | 33 1/8 | 25 | 31 | 6 1/8 | 26 5/16 | 32 5/16 | 6 11/16 | HOSE RACK & EXTINGUISHER: 1- 1/2" x 1-1/2" Hose Rack Unit - 50 or 75' Hose (HRA050B, HRA050CH, HRA075B, HRA075CH) & Cosmic 2 1/2 or Galaxy 2 1/2 - 5 lb Extinguisher |
| 6015 | 6025 | 6035 | Flat Trim | 24 | 30 | 6 | 27 3/8 | 33 3/8 | 25 | 31 | 5 7/8 | 26 5/16 | 32 5/16 | 6 15/16 | |
| 6016 | 6026 | 6036 | 1 1/4" Square | 24 | 30 | 6 | 27 3/8 | 33 3/8 | 25 | 31 | 4 7/8 | 26 5/16 | 32 5/16 | 5 15/16 | |
| 6017 | 6027 | 6037 | 2 1/2" Rolled | 24 | 30 | 6 | 27 3/8 | 33 3/8 | 25 | 31 | 3 5/8* | 26 5/16 | 32 5/16 | 4 11/16* | |
| 6013 | 6023 | 6039 | Surf. Mtd. | 27 3/16 | 33 3/16 | 6 1/2 | 27 3/8 | 33 3/8 | -- | -- | -- | -- | -- | -- | |
| 6214 | 6224 | 6234 | Trimless 5/8" Drywall ± | 24 | 34 3/4 | 6 | 27 1/8 | 37 7/8 | 25 | 35 3/4 | 6 1/8 | 26 5/16 | 37 1/16 | 6 11/16 | HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit - 100' Hose (HRA100B or HRA100CH) & Cosmic 2 1/2 or Galaxy 2 1/2 - 5 lb Extinguisher |
| 6215 | 6225 | 6235 | Flat Trim | 24 | 34 3/4 | 6 | 27 3/8 | 38 1/8 | 25 | 35 3/4 | 5 7/8 | 26 5/16 | 37 1/16 | 6 15/16 | |
| 6216 | 6226 | 6236 | 1 1/4" Square | 24 | 34 3/4 | 6 | 27 3/8 | 38 1/8 | 25 | 35 3/4 | 4 7/8 | 26 5/16 | 37 1/16 | 5 15/16 | |
| 6217 | 6227 | 6237 | 2 1/2" Rolled | 24 | 34 3/4 | 6 | 27 3/8 | 38 1/8 | 25 | 35 3/4 | 3 5/8* | 26 5/16 | 37 1/16 | 4 11/16* | |
| 6213 | 6223 | 6239 | Surf. Mtd. | 27 3/16 | 37 15/16 | 6 1/2 | 27 3/8 | 38 1/8 | -- | -- | -- | -- | -- | -- | |
| 6114 | 6124 | 6134 | Trimless 5/8" Drywall ± | 24 | 30 | 8 | 27 1/8 | 33 1/8 | 25 | 31 | 8 1/8 | 26 5/16 | 32 5/16 | 8 11/16 | HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (H4A050B-2.5 OR HRA075B-2.5) |
| 6115 | 6125 | 6135 | Flat Trim | 24 | 30 | 8 | 27 3/8 | 33 3/8 | 25 | 31 | 7 7/8 | 26 5/16 | 32 5/16 | 8 15/16 | |
| 6116 | 6126 | 6136 | 1 1/4" Square | 24 | 30 | 8 | 27 3/8 | 33 3/8 | 25 | 31 | 6 7/8 | 26 5/16 | 32 5/16 | 7 15/16 | |
| 6117 | 6127 | 6137 | 2 1/2" Rolled | 24 | 30 | 8 | 27 3/8 | 33 3/8 | 25 | 31 | 5 5/8* | 26 5/16 | 32 5/16 | 6 11/16* | |
| 6113 | 6123 | 6139 | Surf. Mtd. | 27 3/16 | 33 3/16 | 8 1/2 | 27 3/8 | 33 3/8 | -- | -- | -- | -- | -- | -- | |
| 6414 | 6424 | 6434 | Trimless 5/8" Drywall ± | 24 | 34 3/4 | 8 | 27 1/8 | 37 7/8 | 25 | 35 3/4 | 8 1/8 | 26 5/16 | 37 1/16 | 8 11/16 | HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 100' Hose (HRA 100B-2.5) |
| 6415 | 6425 | 6435 | Flat Trim | 24 | 34 3/4 | 8 | 27 3/8 | 38 1/8 | 25 | 35 3/4 | 7 7/8 | 26 5/16 | 37 1/16 | 8 15/16 | |
| 6416 | 6426 | 6436 | 1 1/4" Square | 24 | 34 3/4 | 8 | 27 3/8 | 38 1/8 | 25 | 35 3/4 | 6 7/8 | 26 5/16 | 37 1/16 | 7 15/16 | |
| 6417 | 6427 | 6437 | 2 1/2" Rolled | 24 | 34 3/4 | 8 | 27 3/8 | 38 1/8 | 25 | 35 3/4 | 5 5/8* | 26 5/16 | 37 1/16 | 6 11/16* | |
| 6413 | 6423 | 6439 | Surf. Mtd. | 27 3/16 | 37 15/16 | 8 1/2 | 27 3/8 | 38 1/8 | -- | -- | -- | -- | -- | -- | |
| 6614 | 6624 | 6634 | Trimless 5/8" Drywall ± | 24 | 38 3/4 | 8 | 27 1/8 | 41 7/8 | 25 | 39 3/4 | 8 1/8 | 26 5/16 | 41 1/16 | 8 11/16 | HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 125' Hose (HRA 125B-2.5) |
| 6615 | 6625 | 6635 | Flat Trim | 24 | 38 3/4 | 8 | 27 3/8 | 42 1/8 | 25 | 39 3/4 | 7 7/8 | 26 5/16 | 41 1/16 | 8 15/16 | |
| 6616 | 6626 | 6636 | 1 1/4" Square | 24 | 38 3/4 | 8 | 27 3/8 | 42 1/8 | 25 | 39 3/4 | 6 7/8 | 26 5/16 | 41 1/16 | 7 15/16 | |
| 6617 | 6627 | 6637 | 2 1/2" Rolled | 24 | 38 3/4 | 8 | 27 3/8 | 42 1/8 | 25 | 39 3/4 | 5 5/8* | 26 5/16 | 41 1/16 | 6 11/16* | |
| 6613 | 6623 | 6639 | Surf. Mtd. | 27 3/16 | 41 15/16 | 8 1/2 | 27 3/8 | 42 1/8 | -- | -- | -- | -- | -- | -- | |
| 6314 | 6324 | 6334 | Trimless 5/8" Drywall ± | 30 | 30 | 8 | 33 1/8 | 33 1/8 | 31 | 31 | 8 1/8 | 32 5/16 | 32 5/16 | 8 11/16 | HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve, Unit Plus An Extinguisher (Except Sentinel 10-20, 272) |
| 6315 | 6325 | 6335 | Flat Trim | 30 | 30 | 8 | 33 3/8 | 33 3/8 | 31 | 31 | 7 7/8 | 32 5/16 | 32 5/16 | 8 15/16 | |
| 6316 | 6326 | 6336 | 1 1/4" Square | 30 | 30 | 8 | 33 3/8 | 33 3/8 | 31 | 31 | 6 7/8 | 32 5/16 | 32 5/16 | 7 15/16 | |
| 6317 | 6327 | 6337 | 2 1/2" Rolled | 30 | 30 | 8 | 33 3/8 | 33 3/8 | 31 | 31 | 5 5/8* | 32 5/16 | 32 5/16 | 6 11/16* | |
| 6313 | 6323 | 6339 | Surf. Mtd. | 33 3/16 | 33 3/16 | 8 1/2 | 33 3/8 | 33 3/8 | -- | -- | -- | -- | -- | -- | |
| 6514 | 6524 | 6534 | Trimless 5/8" Drywall ± | 32 3/4 | 34 3/4 | 8 | 35 7/8 | 37 7/8 | 33 3/4 | 35 3/4 | 8 1/8 | 35 1/16 | 37 1/16 | 8 11/16 | HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve, 100' Hose Rack Unit Plus FD Valve or Extinguisher (Not Sentinel 20, 272) |
| 6515 | 6525 | 6535 | Flat Trim | 32 3/4 | 34 3/4 | 8 | 36 1/8 | 38 1/8 | 33 3/4 | 35 3/4 | 7 7/8 | 35 1/16 | 37 1/16 | 8 15/16 | |
| 6516 | 6526 | 6536 | 1 1/4" Square | 32 3/4 | 34 3/4 | 8 | 36 1/8 | 38 1/8 | 33 3/4 | 35 3/4 | 6 7/8 | 35 1/16 | 37 1/16 | 7 15/16 | |
| 6517 | 6527 | 6537 | 2 1/2" Rolled | 32 3/4 | 34 3/4 | 8 | 36 1/8 | 38 1/8 | 33 3/4 | 35 3/4 | 5 5/8* | 35 1/16 | 37 1/16 | 6 11/16* | |
| 6513 | 6523 | 6539 | Surf. Mtd. | 35 15/16 | 37 15/16 | 8 1/2 | 36 1/8 | 38 1/8 | -- | -- | -- | -- | -- | -- | |
| 7214 | 7224 | 7234 | Trimless 5/8" Drywall ± | 32 3/4 | 38 3/4 | 8 | 35 7/8 | 41 7/8 | 33 3/4 | 39 3/4 | 8 1/8 | 35 1/16 | 41 1/16 | 8 11/16 | HOSE RACK & FD VALVE OR EXTINGUISHER: 1-1/2" OR 2-1/2" Valve, 125' Hose Rack Unit Plus FD Valve or Extinguisher (Not Sentinel 20, 272) |
| 7215 | 7225 | 7235 | Flat Trim | 32 3/4 | 38 3/4 | 8 | 36 1/8 | 42 1/8 | 33 3/4 | 39 3/4 | 7 7/8 | 35 1/16 | 41 1/16 | 8 15/16 | |
| 7216 | 7226 | 7236 | 1 1/4" Square | 32 3/4 | 38 3/4 | 8 | 36 1/8 | 42 1/8 | 33 3/4 | 39 3/4 | 6 7/8 | 35 1/16 | 41 1/16 | 7 15/16 | |
| 7217 | 7227 | 7237 | 2 1/2" Rolled | 32 3/4 | 38 3/4 | 8 | 36 1/8 | 42 1/8 | 33 3/4 | 39 3/4 | 5 5/8* | 35 1/16 | 41 1/16 | 6 11/16* | |
| 7213 | 7223 | 7239 | Surf. Mtd. | 35 15/16 | 41 15/16 | 8 1/2 | 36 1/8 | 42 1/8 | -- | -- | -- | -- | -- | -- | |
| Fire Department Cabinets | | | | | | | | | | | | | | | |
| 8514 | 8524 | 8534 | Trimless 5/8" Drywall ± | 18 | 18 | 8 | 21 1/8 | 21 3/8 | 19 | 19 | 8 1/8 | 20 5/16 | 20 5/16 | 8 11/16 | FIRE DEPARTMENT VALVE 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain |
| 8515 | 8525 | 8535 | Flat Trim | 18 | 18 | 8 | 21 3/8 | 21 3/8 | 19 | 19 | 7 7/8 | 20 5/16 | 20 5/16 | 8 15/16 | |
| 8516 | 8526 | 8536 | 1 1/4" Square | 18 | 18 | 8 | 21 3/8 | 21 3/8 | 19 | 19 | 6 7/8 | 20 5/16 | 20 5/16 | 7 15/16 | |
| 8517 | 8527 | 8537 | 2 1/2" Rolled | 18 | 18 | 8 | 21 3/8 | 21 3/8 | 19 | 19 | 5 5/8* | 20 5/16 | 20 5/16 | 6 11/16* | |
| 8513 | 8523 | 8539 | Surf. Mtd. | 21 3/16 | 21 3/16 | 8 1/2 | 21 3/8 | 21 3/8 | -- | -- | -- | -- | -- | -- | |
| 8414 | 8424 | 8434 | Trimless 5/8" Drywall ± | 18 | 18 | 10 | 21 1/8 | 21 1/8 | 19 | 19 | 10 1/8 | 20 5/16 | 20 5/16 | 10 11/16 | DUAL SIDE BY SIDE FIRE DEPARTMENT VALVE & EXTINGUISHER OR 2 FIRE DEPARTMENT VALVES: 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain Plus Extinguisher - Cosmic & Galaxy 2 1/2 - 10, Mercury 2 1/2 - 11, Grenadier, Saturn 15-25, Sentinel 5 |
| 8415 | 8425 | 8435 | Flat Trim | 18 | 18 | 10 | 21 3/8 | 21 3/8 | 19 | 19 | 9 7/8 | 20 5/16 | 20 5/16 | 10 15/16 | |
| 8416 | 8426 | 8436 | 1 1/4" Square | 18 | 18 | 10 | 21 3/8 | 21 3/8 | 19 | 19 | 8 7/8 | 20 5/16 | 20 5/16 | 9 15/16 | |
| 8417 | 8427 | 8437 | 2 1/2" Rolled | 18 | 18 | 10 | 21 3/8 | 21 3/8 | 19 | 19 | 7 5/8* | 20 5/16 | 20 5/16 | 8 11/16* | |
| 8413 | 8423 | 8439 | Surf. Mtd. | 21 3/16 | 21 3/16 | 10 1/2 | 21 3/8 | 21 3/8 | -- | -- | -- | -- | -- | -- | |
| 8714 | 8724 | 8734 | Trimless 5/8" Drywall ± | 26 | 26 | 8 | 29 1/8 | 29 1/8 | 27 | 27 | 8 1/8 | 28 5/16 | 28 5/16 | 8 11/16 | DUAL EXTINGUISHER CABINET WITH SHELF: Extinguisher or Fire Dept. Valve - Shelf located 12" from bottom of cabinet - Any Extinguisher Except Sentinel 15-20, 272 |
| 8715 | 8725 | 8735 | Flat Trim | 26 | 26 | 8 | 29 3/8 | 29 3/8 | 27 | 27 | 7 7/8 | 28 5/16 | 28 5/16 | 8 15/16 | |
| 8716 | 8726 | 8736 | 1 1/4" Square | 26 | 26 | 8 | 29 3/8 | 29 3/8 | 27 | 27 | 6 7/8 | 28 5/16 | 28 5/16 | 7 15/16 | |
| 8717 | 8727 | 8737 | 2 1/2" Rolled | 26 | 26 | 8 | 29 3/8 | 29 3/8 | 27 | 27 | 5 5/8* | 28 5/16 | 28 5/16 | 6 11/16* | |
| 8713 | 8723 | 8739 | Surf. Mtd. | 29 3/16 | 29 3/16 | 8 1/2 | 29 3/8 | 29 3/8 | -- | -- | -- | -- | -- | -- | |
| 8614 | 8624 | 8634 | Trimless 5/8" Drywall ± | 26 | 26 | 10 | 29 1/8 | 29 1/8 | 27 | 27 | 10 1/8 | 28 5/16 | 28 5/16 | 10 11/16 | DUAL EXTINGUISHER CABINET WITH SHELF: Extinguisher or Fire Dept. Valve - Shelf located 12" from bottom of cabinet - Any Extinguisher Except Sentinel 15-20, 272 |
| 8615 | 8625 | 8635 | Flat Trim | 26 | 26 | 10 | 29 3/8 | 29 3/8 | 27 | 27 | 9 7/8 | 28 5/16 | 28 5/16 | 10 15/16 | |
| 8616 | 8626 | 8636 | 1 1/4" Square | 26 | 26 | 10 | 29 3/8 | 29 3/8 | 27 | 27 | 8 7/8 | 28 5/16 | 28 5/16 | 9 15/16 | |
| 8617 | 8627 | 8637 | 2 1/2" Rolled | 26 | 26 | 10 | 29 3/8 | 29 3/8 | 27 | 27 | 7 5/8* | 28 5/16 | 28 5/16 | 8 11/16* | |
| 8613 | 8623 | 8639 | Surf. Mtd. | 29 3/16 | 29 3/16 | 10 1/2 | 29 3/8 | 29 3/8 | -- | -- | -- | -- | -- | -- | |
| 8014 | 8024 | 8034 | Trimless 5/8" Drywall ± | 16 | 40 | 9 | 19 1/8 | 43 1/8 | 17 | 41 | 9 1/8 | 18 5/16 | 42 5/16 | 9 11/16 | DUAL EXTINGUISHER CABINET WITH SHELF: Extinguisher or Fire Dept. Valve - Shelf located 12" from bottom of cabinet - Any Extinguisher Except Sentinel 15-20, 272 |
| 8015 | 8025 | 8035 | Flat Trim | 16 | 40 | 9 | 19 3/8 | 43 3/8 | 17 | 41 | 8 7/8 | 18 5/16 | 42 5/16 | 9 15/16 | |
| 8016 | 8026 | 8036 | 1 1/4" Square | 16 | 40 | 9 | 19 3/8 | 43 3/8 | 17 | 41 | 8 1/8 | 18 5/16 | 42 5/16 | 8 15/16 | |
| 8017 | 8027 | 8037 | 2 1/2" Rolled | 16 | 40 | 9 | 19 3/8 | 43 3/8 | 17 | 41 | 6 5/8* | 18 5/16 | 42 5/16 | 7 11/16* | |
| 8013 | 8023 | 8039 | Surf. Mtd. | 19 3/16 | 43 3/16 | 9 1/2 | 19 3/8 | 43 3/8 | -- | -- | -- | -- | -- | -- | |
| Dimensions in Inches | | | | | | | | | | | | | | | |




FIRE BLANKETS & ACCESSORIES

LOCKS & LOCK BOXES



ALARMS

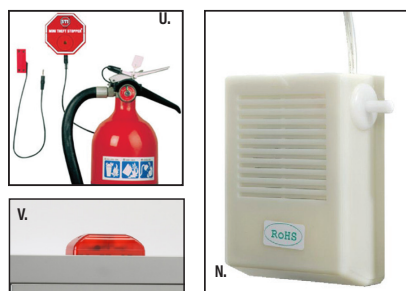

N. COMMANDER ALARM
EASY TO INSTALL CABINET ALARMS PROTECT AGAINST THEFT OR TAMPERING. THE COMMANDER ALARM (SHOWN HERE) IS AN ECONOMICAL CHOICE.

FIRE BLANKETS AND CABINETS

Fire Blankets & Cabinet: Royal fire blanket cabinets come in two basic designs. The Royal 9519S21 is a roller type for emergency use. The enclosed blanket is attached to the vertical roller and comes with arm loops to enable a person to wrap themselves in the blanket in one continuous motion. The Royal 9613S21 is a handy "drop" type with folded blanket. Both units are surface mounted. Each comes with a nominal 62" x 80", 2.75 pound, processed wool/synthetic fire blanket, which meets the Flammable Fabrics Act: Flammability of Clothing Textiles, Title 16, CFR1610.

BLANKET & EXTINGUISHER COMBINATION CABINET

Door & Trim Construction: CRS with white powder-coat finish, clear anodized aluminum or #4 stainless steel. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch.

Trim Style & Depth: Recessed - 3/8" flat trim, Semi-recessed - 1-1/2" square trim, 2-1/2", 4" or 4-1/2" rolled edge, Surface-Mounted - square edge. Rolled edge aluminum trims formed of extrusions. 1-3/4" face trim on frame and 1-1/4" trim on door.


Tub: CRS with white powder coat finish standard. Tub of surface mounted models are same material as trim.

Door Style: Full Glass, Vertical Duo, Solid Door.

Glazing: .09 Acrylic, tempered or WireShield™ filmed wire glass.

Shelf: Shelf is located 9" from the top of the cabinet, providing storage of the blanket above the extinguisher.

PULLS

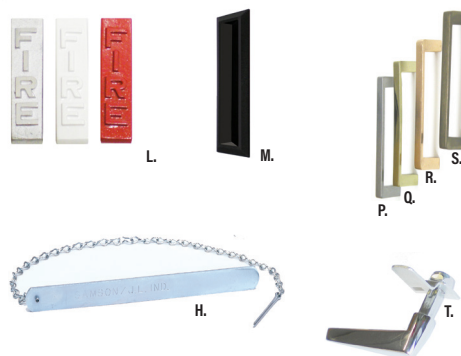

ACCESSORIES

- A Security lock box 4" x 6" x 2 1/2" #LB
- B Security lock box alarm cover 6" x 6" x 2 1/2" #LBAC
- C Fire Dept lockbox L.A.F.D. with red decal, 16 gauge, 5" x 5" x 1 1/2" approved lockbox for L.A. county #LBLA16
- D Keyed-alike Abus padlock #PL
- E Samson brass keyed-alike padlock #PLB
- F Break glass lock lever assembly LL24-KIT
- G Fire department lock box 4" x 6" x 1 1/2" #LBFD
- H Breaker bar with chain #HCM
- L Futura "FIRE" handle #PUF, PUFR, PUFW
- M Flush pull handle
- N Commander Alarm
- O Standard zinc pull #PUS
- P Chrome pull #PUCH
- Q US10B pull
- R Bronze pull
- S Brass pull
- T Lever Handle #LH
- U Brigadier alarm (BA)
- V Strobe alarm (SA)





9613S21

9519S21



3616F10

| TRIM & DOOR & SERIES # | | | | TUB I.D. | | | FRAME O.D. | | | Wall Opening: Non-Rated | | | Wall Opening Fire-Rated | | |  | ACCOMMODATES FOLLOWING EXTINGUISHERS |
|------------------------|----------|-----------|--------------------------|----------|---------|---|------------|--------|-----|----------------------------|--------|-----|----------------------------|---------|----------|---|--|
| Steel | Aluminum | Stainless | Trim Style | W | H | D | W | H | D | W | H | D | W | H | D | | |
| 3615 | 3625 | 3635 | Flat Trim | 12 | 36 | 8 | 15-3/8 | 39-3/8 | 13 | 37 | 8 | 8 | 14 5/16 | 38 5/16 | 8 15/16 |  | Cosmic & Galaxy 2.5-10, Mercury 2.5-15 (FM11C & 15C), Sentinel 5, Grenadier |
| 3616 | 3626 | 3636 | 1-1/2" Square | 12 | 36 | 8 | 15-3/8 | 39-3/8 | 13 | 37 | 6-3/4 | 6 | 14 5/16 | 38 5/16 | 7 11/16 | | |
| 3617 | 3627* | 3637 | 2-1/2" Rolled | 12 | 36 | 8 | 15-3/8 | 39-3/8 | 13 | 37 | 5-3/4* | 5 | 14 5/16 | 38 5/16 | 6 11/16* | | |
| 3612 | 3622* | 3632 | 4" Rolled, Flush Pull | 12 | 36 | 8 | 15-3/8 | 39-3/8 | 13 | 37 | 4-1/4* | 4 | 14 5/16 | 38 5/16 | 5 3/16* | | |
| 3618 | 3628* | 3638 | 4-1/2" Rolled | 12 | 36 | 8 | 15-3/8 | 39-3/8 | 13 | 37 | 3-3/4* | 3 | 14 5/16 | 38 5/16 | 4 11/16* | | |
| 3613 | 3623 | 3633 | Surface-Mtd. | 15-3/16 | 39-3/16 | 8 | 15-3/8 | 39-3/8 | --- | --- | --- | --- | --- | --- | --- | | |

*ADD 5/8" TO DEPTH NEEDED FOR THIS CABINET IN ALUMINUM.



DECALS AND DIE CUT LETTERING

| DECALS & DIECUTS | | DIECUT LETTERING & SIGNS | |
|------------------|---|--------------------------|--|
| 1 | Decal: 4" x 4" - red & white, WARNING #DRWF | 18 | Diecut: 3/4" x 18" - vertical, black, FIRE EXT #LDCVBFE |
| 6 | Decal: 12" x 3 1/2" - vertical, red & white, FIRE EXT. #DRFA | 18R | Diecut: 3/4" x 18" - vertical, black, in reverse FIRE EXT#LDCVBRFE |
| 7 | Decal: 1" x 4 1/4" - vertical, red & wht, IN CASE OF FIRE #PHCD-RED | 19 | Diecut: 2 1/4" x 7 3/4" - horizontal, red, FIRE EXT#LDCHRFE |
| 8 | Decal: 6" x 6" - octagonal, red, black & white, F.D. VALVE #FDVO | 20 | Diecut: 2 1/4" x 7 3/4" - horizontal, white, FIRE EXT#LDCHWFE |
| 9 | Decal: 4" x 9" - horizontal, black & red, FIRE HOSE #1403 | 21 | Diecut: 2 1/4" x 7 3/4" - horizontal, black, FIRE EXT#LDCHBFE |
| 10 | Decal: 7 1/8" x 2 1/4" - horizontal, red & white, FIRE EXT. #LDHRFE | 22 | Plastic sign: 4" x 12" 3D angle FIRE EXTINGUISHER #22S |
| 11 | Decal: 7 1/8" x 2 1/4" - horizontal, FIRE EXT. #LDHWFE | 23 | Plastic sign: 4" x 18" 3D tent FIRE EXTINGUISHER #23S |
| 12 | Decal: 7 1/8" x 2 1/4" - horizontal, black & white, FIRE EXT. #LDHBFE | 24 | Plastic sign: 5" x 6" 3D tent FIRE EXTINGUISHER #24S |
| 13 | Decal: 2" x 19" - vertical, red/clear FIRE EXT. #LDVRFE | 25 | Plastic sign: 4" x 12" flush vertical FIRE EXT #25S |
| 14 | Decal: 2" x 19" - vertical whitet/clear FIRE EXT. #LDVWFE | 26 | Diecut: 7 7/8" x 1" - horizontal, red, FIRE BLANKET #LDCHRFB |
| 15 | Decal: 2" x 19" - vertical black/clear FIRE EXT. #LDVBFE | 27 | Diecut: 10 1/4" x 4 3/8" - horizontal, red FD VALVE #LDCHRFDV-R |
| 16 | Diecut: 3/4" x 18" - vertical, red, FIRE EXT #LDCVRFE | 28 | Diecut: 3/4" x 18" - ascending, red, FIRE EXT #LDCVARFE |
| 16R | Diecut: 3/4" x 18" - vertical, red, in reverse FIRE EXT #LDCVRRFE | 28R | Diecut: 3/4" x 18" - ascending, red, reverse FIRE EXT #LDCVARRFE |
| 17 | Diecut: 3/4" x 18" - vertical, white, FIRE EXT#LDCVWFE | 29 | Diecut: 3/4" x 17" - vertical, red FIRE DEPT VALVE #LDCVRFDV |
| 17R | Diecut: 3/4" x 18" - vertical, white, FIRE EXT in reverse #LDCVWRFE | 30 | Diecut 1" x 17" - ascending red FIRE DEPARTMENT VALVE # LDCARFDV |



PROJECT SHOWCASE

1144 Fifteenth - Denver, CO

3M Headquarters - Maplewood, MN

Apple Park (Apple's "Spaceship" campus) - Cupertino, CA

Archer Hotel - Napa CA

Bronx Mental Health Adult Behavioral Health Center - New York, NY

Centurylink Arena - Omaha, NE

Cherry Hospital - Goldsboro, NC

Choctaw Casino Resort - Durant, OK

Cyrus One Data Center - Houston TX

Cyrus One Data Center - Sterling VA

Department of Defense

Disney Coronado Springs - Orlando FL

Exxon Mobil Campus - Houston, TX

Fort Bliss Hospital - El Paso, TX

Hard Rock Stadium - Miami Gardens, FL

Indianapolis International Airport - Indianapolis, IN

Kimpton Argyle Hotel - Hollywood, CA

Lambeau Field Renovations - Green Bay, WI

Levi's Stadium - Santa Clara, CA

Microsoft Data Center - Des Moines, IA

NYU College of Nursing/Dental - New York, NY

Radisson Blu Mall of America - Bloomington, MN

Ritz Carlton Residence Towers - Waikiki Beach HI

SalesForce Tower - San Francisco, CA

Sanford Health Facilities - Fargo ND, Sioux Falls, SD

Sentry Insurance Headquarters Expansion - Stevens Point, WI

Target Field - Minneapolis, MN

Toyota - Plano, TX

United Health Group Corporate Campus - Eden Prairie, MN

Universal Studios Aventura Hotel - Orlando FL

University of Kentucky Flats Dorms - Lexington, KY

U.P. Health System - Marquette, MI

US Bank Stadium - Minneapolis, MN

Wilshire Grant Tower - Los Angeles, CA

World Trade Center VSC Project - New York NY



TARGET FIELD - COSMPOLITAN SERIES



HAZELTINE NATIONAL CLUBHOUSE
CAVALIER SERIES



RADISSON BLU - COSMOPOLITAN SERIES




KEY TO CABINET NUMBER SYSTEM

| Recessed Tub Size (I.D.) | | Door/Trim Material | | Trim Depth | | | |
|--------------------------|---------------------|--|---|---|--|--|--|
| 15 | 10 1/2 x 24 x 4 | 1 | Steel, white primer finish | 2 | Semi-Recessed 4" rolled edge (Flush pull) | | |
| 17 | 10-1/2 x 24 x 5 | 2 | Aluminum, #180 clear satin anodized finish | 3 | Surface Mount (4", 6", 8" or 9"), square edge for steel and aluminum | | |
| 18 | 10 1/2 x 24 x 5 1/2 | 3 | Stainless Steel, #4 satin finish | 4 | Trimless recessed flange for 5/8" drywall or 3/4" plaster. | | |
| 10 & 12 | 10 1/2 x 24 x 6 | 4 | Bronze, US 10 satin clear coated finish | 5 | Full recessed 3/8", square edge | | |
| 11 | 9 x 18 x 4 11/16 | 5 | Brass, US 3 polished coated finish | 6 | Semi-recessed 1 1/4", 1 1/2", square edge | | |
| 20 | 12 x 27 x 7 3/4 | 7 | US4 Satin Brass (priced on application) | 7 | Semi-recessed 2 1/2" or 3" rolled edge | | |
| 25 | 14 x 30 x 4 | 8 | US10B Oil-rubbed Bronze (priced on application) | 8 | Semi-recessed 4 1/2", rolled edge | | |
| 30 | 16 x 32 x 7 3/4 | 9 | Color Anodizing on Aluminum (priced on application) | 9 | Surface mount 4", 6", 8" or 9" rolled edge for stainless steel or steel. (May be a special order item) | | |
| 36 | 12 x 36 x 8 | Note: Bronze and brass are not available in 40, 45, or 58 tub sizes. Special materials and finishes are available. Contact JL with your special requirements. | | Note: Bronze and brass are not available in # 8, 9 or 2 trim depths. | | | |
| 40 | 20 x 27 x 7 3/4 | | | | | | |
| 45 | 28 x 30 x 4 | | | | | | |
| 55 | 18x18x7-3/4 | | | | | | |
| 56 | 10 1/2 x 24 x 5 3/4 | | | | | | |
| 57 | 16 x 32 x 7 3/4 | | | | | | |
| 58 | 32 x 32 x 7-3/4 | | | | | | |
| 59 | 16 x 40 x 8-3/4 | | | | | | |
| 60 | 24 x 30 x 6 | | | | | | |
| 61 | 24 x 30 x 8 | | | | | | |
| 62 | 24 x 34 3/4 x 6 | | | | | | |
| 63 | 30 x 30 x 8 | | | | | | |
| 64 | 24 x 34 3/4 x 8 | | | | | | |
| 65 | 32 3/4 x 34 3/4 x 8 | | | | | | |
| 66 | 24 x 38 3/4 x 8 | | | | | | |
| 72 | 32 3/4 x 38 3/4 x 8 | | | | | | |
| 80 | 16 x 40 x 9 | | | | | | |
| 81 | 9 x 18 x 5 1/2 | | | | | | |
| 84 | 18 x 18 x 10 | | | | | | |
| 85 | 18 x 18 x 8 | | | | | | |
| 86 | 26 x 26x 10 | | | | | | |
| 87 | 26 x 26 x 8 | | | | | | |


TOP VIEW

***Note:** For surface mount cabinets, add 3 3/16" to width and height measurements. See product page for wall opening dimensions.

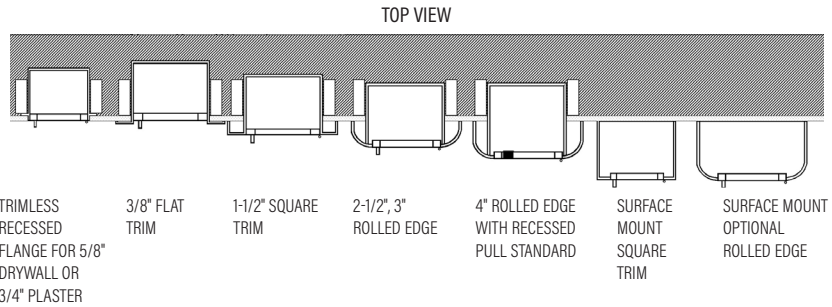

***Note:** For surface mount cabinets, add 3 3/16" to width and height measurements. See product page for wall opening dimensions.

| Door Style | | Door Glazing | |
|----------------------------|---|-------------------------------|---|
| B10 | Solid with acrylic insert and Saf-T-Lok™ with pull handle | 10 | Clear acrylic |
| D | Duo panel with pull handle | 13 | Clear wire w/ Safety Film |
| E | Duo panel with Saf-T-Lok™ with pull handle | 15 | 1/4" bronze acrylic |
| F | Full glass with pull handle | 16 | 1/4" gray acrylic |
| G | Full glass with Saf-T-Lok™ with pull handle | 17 | Clear tempered glass |
| L22 | Solid with lock, no glazing and pull handle | 18 | Clear safety glass |
| S21 | Solid with pull handle, no glazing (except Embassy) | 25 | Clear Bubble - Clear Vu, SMB, RBC |
| L24 | Solid with cylinder lock & no pull handle | 26 | Red Bubble - Clear Vu, SMB, RBC |
| V | Vertical Duo Panel with pull handle (except Embassy) | 27 | Bronze Bubble - Clear Vu, SMB, RBC |
| W | Vertical Duo Panel with Saf-T-Lok™ with pull handle | | |
| Panorama Door Styles Below | | Panorama Glazing Styles Below | |
| P | Colored acrylic for Panorama, with pull handle | 40 | 3/16" Black acrylic with white "V" letter |
| Q | Colored acrylic for Panorama, with Saf-T-Lok™ | 41 | 3/16" Red acrylic with white "V" letter |
| | | 42 | 3/16" White acrylic with black "V" letter |
| | | 43 | 3/16" White acrylic with red "V" letter |
| | | 45 | 3/16" Black acrylic with white "H" letter |
| | | 46 | 3/16" Red acrylic with white "H" letter |
| | | 47 | 3/16" White acrylic with black "H" letter |
| | | 48 | 3/16" White acrylic with red "H" letter |
| | | 50 | 3/16" Black acrylic with white "A" letter |
| | | 51 | 3/16" Red acrylic with white "A" letter |
| | | 52 | 3/16" White acrylic with black "A" letter |
| | | 53 | 3/16" White acrylic with red "A" letter |
| C | Clear acrylic for Panorama, frameless | 70 | Clear 3/16" acrylic with pull handle |
| | | 71 | Clear 3/16" acrylic with Saf-T-Lok™ |

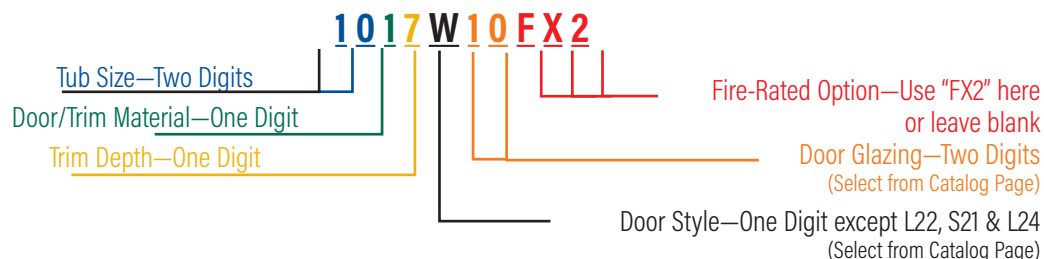



OPTIONAL METAL FINISHES

OPTIONAL POWDERCOAT PAINT COLORS



RED (R)



BLACK (B)



BRONZE (BR)



BRASS (BRA)



SAND (S)



SC BEIGE (SB)



DARK ANODIZED



SILVER (SI)



GRAY HAMMERTONE (GH)



WHITE (W)



AMS BEIGE (AB)



ORANGE (O)



SAFETY YELLOW (Y)

PLEASE REFER TO PRODUCT PAGE TO SEE WHICH COLOR OPTIONS ARE AVAILABLE

ANODIZED ALUMINUM

OTHER PRODUCTS FROM JL INDUSTRIES



CORNER GUARDS



LABORATORY FUME HOODS | CASEWORK



FLOOR DOORS

ACCESS PANELS



AED'S

AED CABINETS



ROOF HATCHES

SMOKE VENTS



ENTRANCE MAT AND GRATING SYSTEMS

ACTIVAR^{INC.}

CONSTRUCTION PRODUCTS GROUP



JL INDUSTRIES



AIR LOUVERS



HIAWATHA



SAMSON



THOMAS



ACCESSORIES
RIA
ROOFTOP

CONTACT US: PHONE: 800-554-6077 | FAX: 952-835-2218

EMAIL: SALES@ACTIVARCPG.COM

MANUFACTURING: BLOOMINGTON, MN | COMMERCE, CA

WAREHOUSES: DALLAS, TX | LANCASTER, PA | SEATTLE, WA | FARGO, ND | OMAHA, NE | FT MYERS, FL | ATLANTA, GA

The Activar Construction Products Group (ACPG) is a dynamic group of 6 companies that combine resources, innovation and experience to serve the commercial construction industry. For over 70 years, JL Industries, Samson Products, RoofTop Accessories and Thomas Enterprises have manufactured and distributed some of the leading lines of fire protection products including a full line of fire extinguishers and cabinets, AEDs and cabinets plus valve and hose cabinets. They also offer rated and non-rated access panels, roof accessories, corner guards, detention products and entrance floor mats & gratings. Air Louvers offers a wide variety of metal vision lites & louvers, specialized glass, astragals, and metal edging for both wood and hollow metal doors. Hiawatha Inc. has provided high-quality architectural door hardware and components for over 50 years. Our centrally-located warehouses and 2 manufacturing locations offer quick shipping of our most popular products to most major metropolitan areas of the US. The two manufacturing locations in California and Minnesota that offer a both a full range of products and custom manufacturing